

4

3

2

1

MATERIAL & FINISH:

1. BODY: BRASS, ALBALOY PLATED
2. CENTER CONTACT: BRASS, GOLD PLATED
3. INSULATOR: PTFE
4. UNLOCK SEEVE: BRASS, ALBALOY PLATED



ELECTRICAL DATA:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~6GHZ

ENVIRONMENTAL DATA:


1. TEMPERATURE RANGE: -55°C~+155°C
2. 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/16/15	J. QU

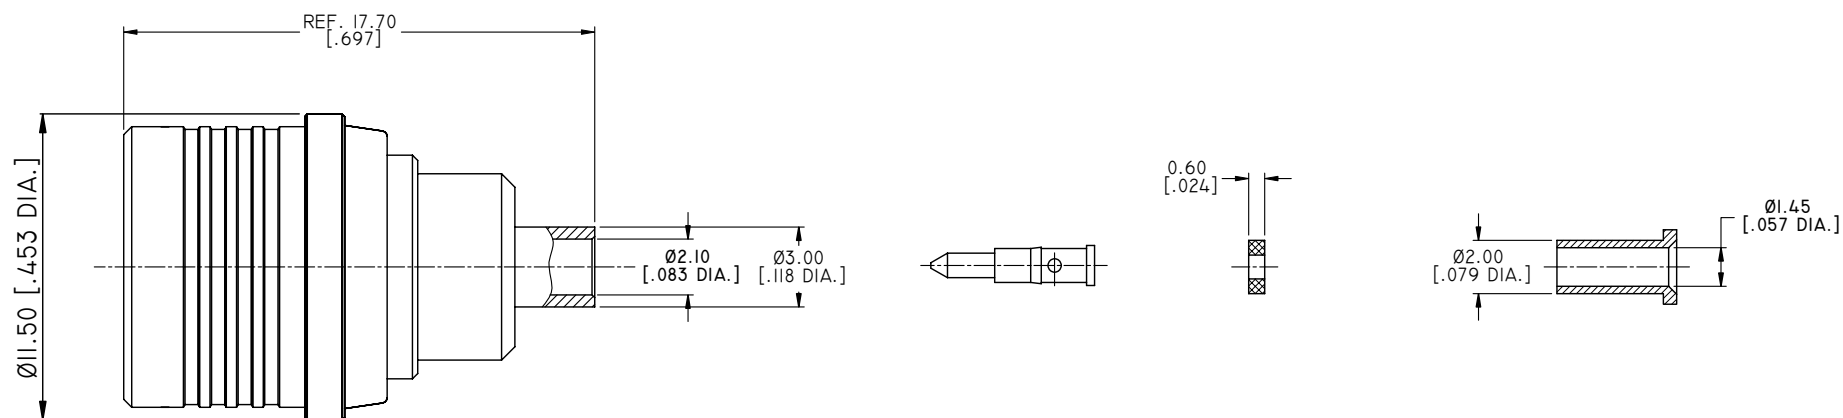

CABLE STRIPPING DIMENSIONS

HEX. CRIMP TOOL



FERRULE
HEX. 2.54 [.010]

CRIMP WIDTH: 2.50 [.098]

DRAWN	X. B. YANG	DATE	03/16/15
CHECKED	L. YANG	DATE	03/16/15
APPROVED	J. QU	DATE	03/16/15
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
QMA STRAIGHT MALE CRIMP FOR RG178 CABLE

VIEW	PART NO. ANO 2611-2094		
 	SIZE A3	SCALE 5:1	SHEET 1/1
			REV. A

4

3

2

1