

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 UNLOCK SEEVE: BRASS, ALBALOY PLATED
- 5 CRIMP FERRULE: COPPER, NICKEL PLATED
- 6 O-RING: MVQ(SILICONE RUBBER)

MECHANICAL DATA:

- 1 DURABILITY: 500 CYCLES MIN.





ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:


- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHz
- 3 VSWR: 1.25 MAX.

| REVISIONS | | | |
|-----------|------------------------------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 06/27/16 | J. QU |
| B | CABLE STRIPPING DIMENSIONS CHANGED | 08/25/21 | J. QU |

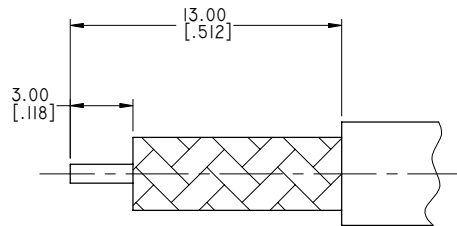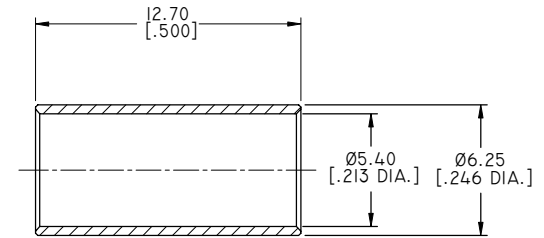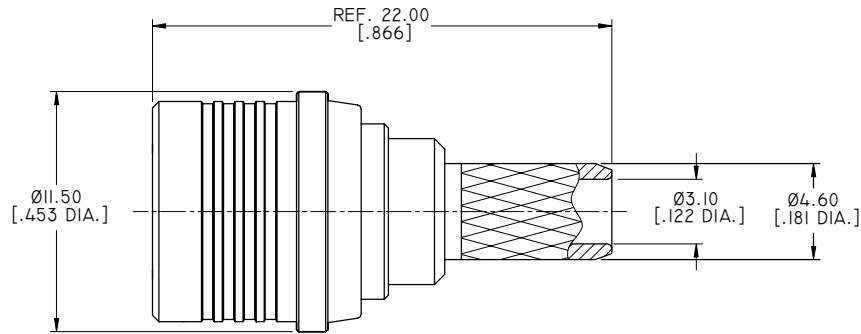

CABLE STRIPPING DIMENSIONS

HEX. CRIMP TOOL



CRIMP WIDTH: 10.0 [.394]

| | | | |
|----------|------------|------|----------|
| DRAWN | X. B. YANG | DATE | 08/25/21 |
| CHECKED | W. YANG | DATE | 08/25/21 |
| APPROVED | J. QU | DATE | 08/25/21 |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:


| | |
|-----|---------------|
| .XX | ±0.13 [.005"] |
| .X | ±0.20 [.008"] |
| X | ±0.50 [.019"] |
| .X° | ±1° |
| X° | ±2° |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD



TITLE
QMA STRAIGHT MALE CRIMP FOR EP-180 CABLE

VIEW



PART NO.
ANO 2611-2104

| | | | |
|------|-------|-------|------|
| SIZE | SCALE | SHEET | REV. |
| A3 | 4:1 | 1/1 | B |