

1.0 MATERIAL & FINISH:

- 1.1 BODY: BRASS, SEE TABLE
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 1.3 INSULATOR: PTFE
- 1.4 WASHER: PHOSPHOR BRONZE, SEE TABLE
- 1.5 FASTENING NUT: BRASS, SEE TABLE
- 1.6 O-RING: MVQ(SILICONE RUBBER)



2.0 ELECTRICAL DATA:

- 2.1 IMPEDANCE: 50 Ω
- 2.2 FREQUENCY RANGE: DC~6GHZ
- 2.3 VSWR: ≤1.30

3.0 ENVIRONMENTAL DATA:



- 3.1 TEMPERATURE RANGE: -55°C~+155°C
- 3.2 2011/65/EU ( RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/31/14	J. QU
B	DRAWING FORMAT CHANGED	09/05/17	J. QU

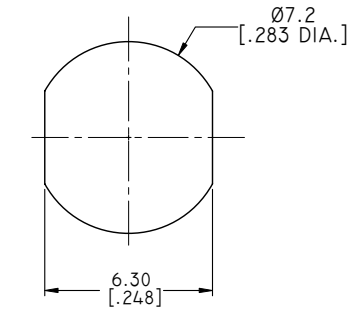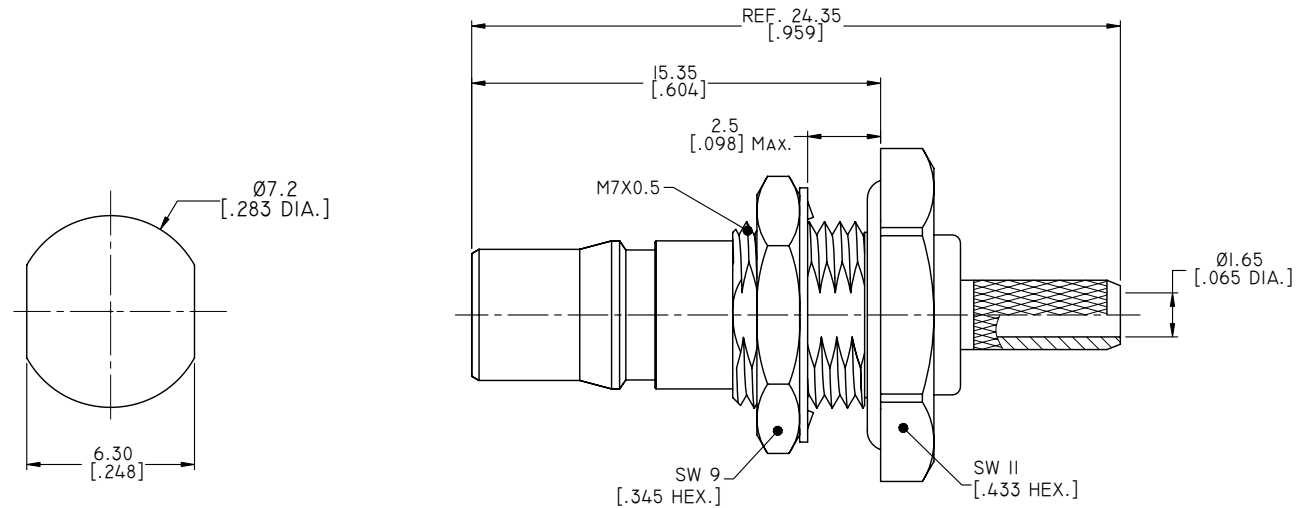


RECOMMENDED MOUNTING HOLE

PART NUMBER	PART	FINISH
ANO 2612-1014	BODY / WASHER FASTENING NUT	NICKEL
ANO 2612-1014-1		GOLD
ANO 2612-1014-2		ALBALOY

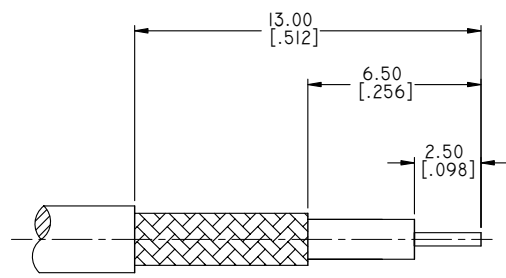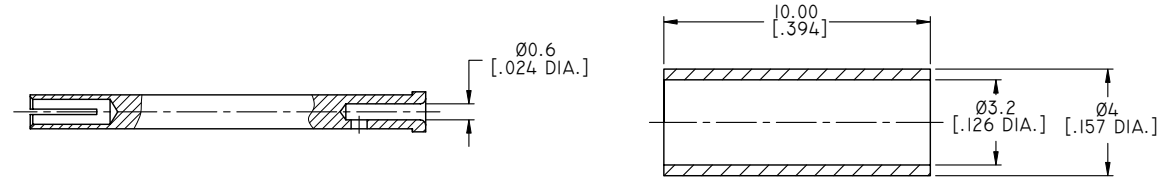

CABLE STRIPPING DIMENSIONS



HEX.CRIMP TOOL  
CRIMP WIDTH:7.5 [.295]

DRAWN	L. YANG	DATE	09/05/17
CHECKED	X. B. YANG	DATE	09/05/17
APPROVED	J. QU	DATE	09/05/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
QMA STRAIGHT WATERPROOF BULKHEAD FEMALE CRIMP FOR LMR100/RG316			
VIEW		PART NO.	
		ANO 2612-1014	
SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	B