

4

3

2

1

1.0 MATERIAL & FINISH:

- 1.1 BODY: SEE TABLE
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 1.3 INSULATOR: PTFE
- 1.4 LOCK WASHER: SEE TABLE
- 1.5 FASTENING NUT: SEE TABLE
- 1.6 O-RING: MVQ(SILICONE RUBBER)


2.0 ELECTRICAL DATA:

- 2.1 IMPEDANCE: 50 Ω
- 2.2 FREQUENCY RANGE: DC~6GHZ
- 2.3 VSWR: ≤1.30



3.0 ENVIRONMENTAL DATA:

- 3.1 TEMPERATURE RANGE: -55°C~+155°C
- 3.2 2011/65/EU (RoHS): COMPLIANT


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
E	TECHNICAL DATA ADDED	08/25/12	J. QU
F	DRAWING FORMAT CHANGED	09/05/17	J. QU
F	ADDED PART NO.	01/14/20	J. QU




RECOMMENDED MOUNTING HOLE

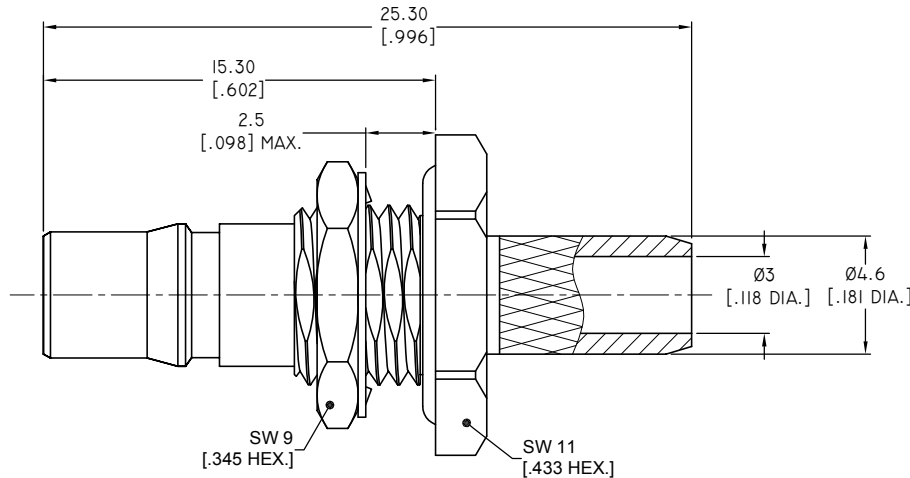


PART NO.	PART	MATERIAL	FINISH
ANO 2612-1017-1	BODY	BRASS	ALBALOY
	FASTENING NUT	BRASS	ALBALOY
	LOCK WASHER	PHOSPHOR BRONZE	ALBALOY
ANO 2612-1017-2	BODY	STAINLESS STEEL	PASSIVATED
	FASTENING NUT	STAINLESS STEEL	PASSIVATED
	LOCK WASHER	STAINLESS STEEL	PASSIVATED

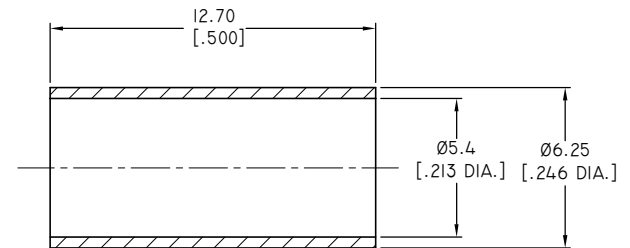

HEX.CRIMP TOOL



CRIMP WIDTH: 10 [.394]

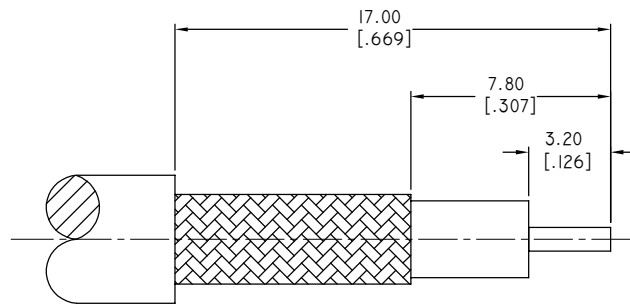

CABLE STRIPPING DIMENSIONS

DRAWN	L. YANG	DATE	01/14/20
CHECKED	X. B. YANG	DATE	01/14/20
APPROVED	J. QU	DATE	01/14/20
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
**QMA STRAIGHT WATERPROOF BULKHEAD
 FEMALE CRIMP FOR LMR195**

VIEW	PART NO. ANO 2612-1017			
	SIZE A3	SCALE 5:1	SHEET 1/1	REV. G

4

3

2

1