

4 | 3 | 2 | 1

MATERIAL & FINISH:

- 1 BODY : STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PEI
- 4 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 5 SOLDER FERRULE: BRASS, GOLD PLATED



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~40 GHZ
- 3 VSWR: 1.35 MAX.

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55 °C~+165°C
- 2 2011/65/EU (RoHS): COMPLIANT

| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 12/06/18 | J. QU |
| | | | |

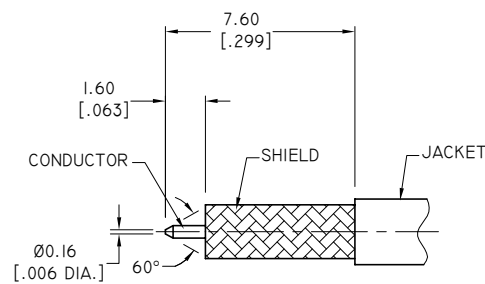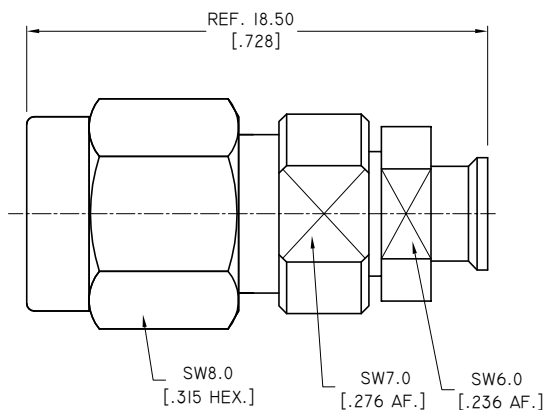

CABLE STRIPPING DIMENSIONS

| | | | |
|---|-----------------|--|----------|
| DRAWN | P. CHEN | DATE | 12/06/18 |
| CHECKED | X. B. YANG | DATE | 12/06/18 |
| APPROVED | J. QU | DATE | 12/06/18 |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD | |
| .XX | ±0.13 [.005"] | | |
| .X | ±0.20 [.008"] | | |
| X | ±0.50 [.019"] | | |
| X° | ±1° | | |
| X° | ±2° | | |



TITLE
2.92MM STRAIGHT MALE SOLDER FOR TFLX405 CABLE CAPTIVATED CONTACT

| | | | | | |
|------|---------------------------|------------|--------------|--------------|-----------|
| VIEW | PART NO. ANO 2911-2115 | SIZE A3 | SCALE 5:1 | SHEET 1/1 | REV. A |
|------|---------------------------|------------|--------------|--------------|-----------|

4 | 3 | 2 | 1