MATERIAL & FINISH:

1 BODY : STAINLESS STEEL, PASSIVATED
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 INSULATOR: PEI
4 COUPLING NUT: STAINLESS STEEL, PASSIVATED
5 SOLDER FERRULE: BRASS, GOLD PLATED

ELECTRICAL DATA:

1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~40 GHz
3 VSWR: 1.35 MAX.

ENVIRONMENTAL DATA:

1 TEMPERATURE RANGE: -55℃~+165℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/07/20	J. QU

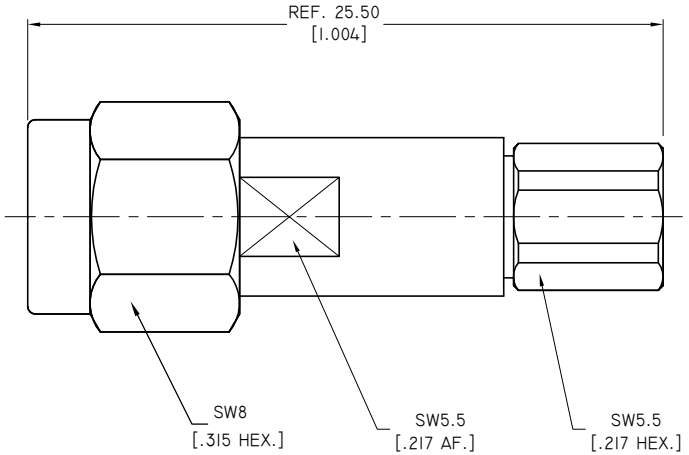

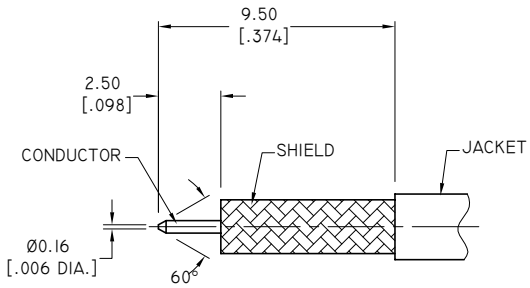

CABLE STRIPPING DIMENSIONS

DRAWN	P. CHEN	DATE 04/07/20
CHECKED	X. B. YANG	DATE 04/07/20
APPROVED	J. QU	DATE 04/07/20

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD

ANOISON ...we create connection for technologies

TITLE
2.92MM STRAIGHT MALE SOLDER FOR AFLEX086 CABLE CAPTIVATED CONTACT

VIEW

PART NO. ANO 2911-2141

SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A