

1.0 MATERIAL & FINISH:

- 1.1 BODY: STAINLESS STEEL, PASSIVATED
- 1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 1.3 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 1.4 INSULATOR: PEI
- 1.5 RETAINING RING: BERYLLIUM COPPER ALLOY, NICKEL PLATED



2.0 ENVIRONMENTAL DATA:

- 2.1 TEMPERATURE RANGE: -55°C~+135°C
- 2.2 2011/65/EU (RoHS): COMPLIANT

3.0 ELECTRICAL SPECIFICATIONS:

- 3.0 IMPEDANCE: 50 Ω
- 3.2 FREQUENCY RANGE: DC~40GHZ
- 3.3 VSWR: 1.10 MAX. @ DC~27GHZ
1.15 MAX. @ 27~40GHZ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/17/15	J. QU
B	CHANGED I.O MATERIAL & FINISH	11/16/15	J. QU
C	CHANGED COUPLING NUT DRAWINGS	09/23/19	J. QU

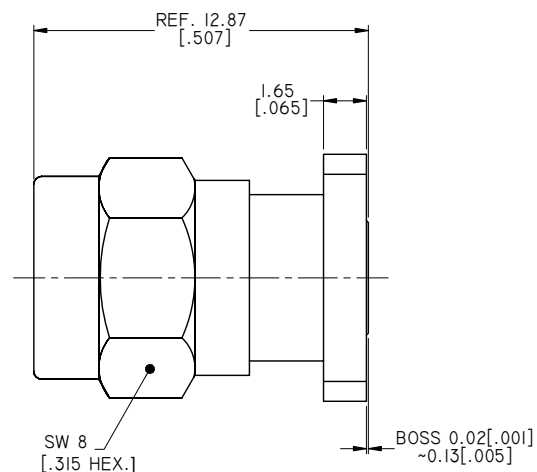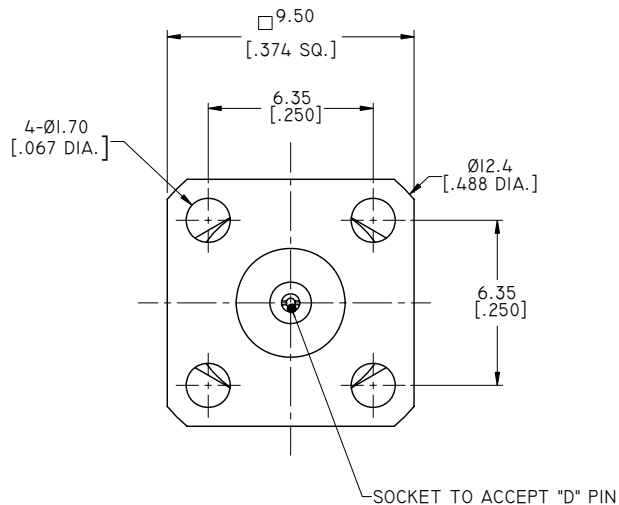

PART NO.	D	MAX. PIN DEPTH
ANO 2911-3013-1	Ø0.23 [0.009 DIA.]	1.65 [0.065]
ANO 2911-3013-2	Ø0.30 [0.012 DIA.]	1.52 [0.060]
ANO 2911-3013-3	Ø0.51 [0.020 DIA.]	1.65 [0.065]

DRAWN	P. CHEN	DATE	09/23/19
CHECKED	X. B. YANG	DATE	09/23/19
APPROVED	J. QU	DATE	09/23/19
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2019 ANOISON ELECTRONICS LTD	
.XX	±0.13 [0.005"]		
.X	±0.20 [0.008"]		
X	±0.50 [0.019"]		
.X°	±1°		
X°	±2°		



TITLE			
2.92MM STRAIGHT MALE, 4 HOLES FLANGE FIELD REPLACEABLE			
VIEW		PART NO.	
		ANO 2911-3013	
SIZE	SCALE	SHEET	REV.
A3	5:1	I/1	C