


1.0 MATERIAL & FINISH:
 1.1 BODY: STAINLESS STEEL, PASSIVATED
 1.2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
 1.3 COUPLING NUT: STAINLESS STEEL, PASSIVATED
 1.4 INSULATOR: PEI
 1.5 RETAINING RING: BERYLLIUM COPPER ALLOY, NICKEL PLATED

2.0 ENVIRONMENTAL DATA:
 2.1 TEMPERATURE RANGE: -55°C~+135°C
 2.2 2011/65/EU (RoHS): COMPLIANT

3.0 ELECTRICAL SPECIFICATIONS:
 3.1 IMPEDANCE: 50 Ω
 3.2 FREQUENCY RANGE: DC~40GHZ
 3.3 VSWR: 1.10 MAX. @ DC~27GHZ
 1.15 MAX. @ 27~40GHZ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/17/15	J. QU
B	CHANGED TEMPERATURE RANGE	11/16/15	J. QU
C	ADDED Ø0.38 [.015 DIA.]	04/26/16	J. QU

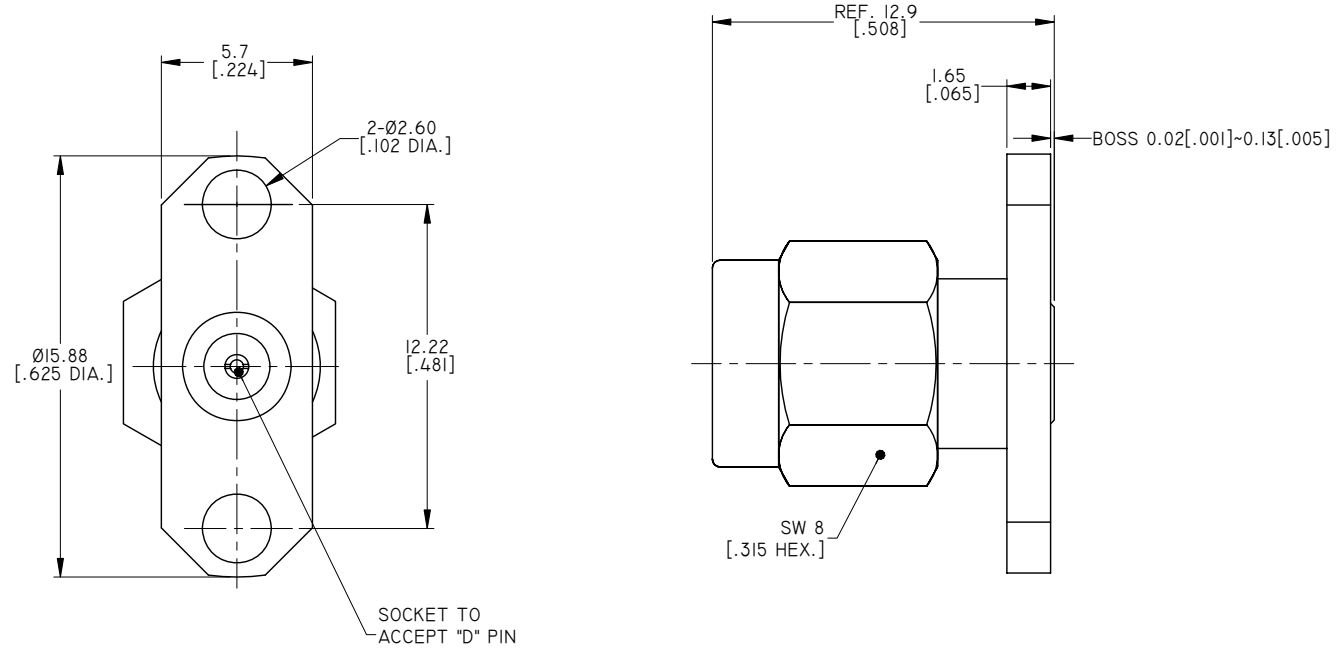

PART NO.	D	MAX. PIN DEPTH
ANO 2911-3054-1	Ø0.23 [.009 DIA.]	1.65 [.065]
ANO 2911-3054-2	Ø0.30 [.012 DIA.]	1.52 [.060]
ANO 2911-3054-3	Ø0.51 [.020 DIA.]	1.65 [.065]
ANO 2911-3054-4	Ø0.38 [.015 DIA.]	1.65 [.065]

DRAWN	L. YANG	DATE	04/26/16
CHECKED	X. B. YANG	DATE	04/26/16
APPROVED	J. QU	DATE	04/26/16
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2016 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
 2.92MM STRAIGHT MALE, 2 HOLES FLANGE FIELD REPLACEABLE

VIEW	PART NO. ANO 2911-3054			
SIZE A3	SCALE 5:1	SHEET 1/1	REV. C	