

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, GOLD PLATED
- 2 COUPLING NUT: BRASS, GOLD PLATED

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~40 GHz

MECHANICAL DATA:

- 1 CENTER CONTACT: CAPTIVATED
- 2 OUTER CONTACT: SOLDERED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/10/12	J. Q
B	DRAWING CHANGED	02/20/25	J. Q

D

D

C


C

B

B

A

A

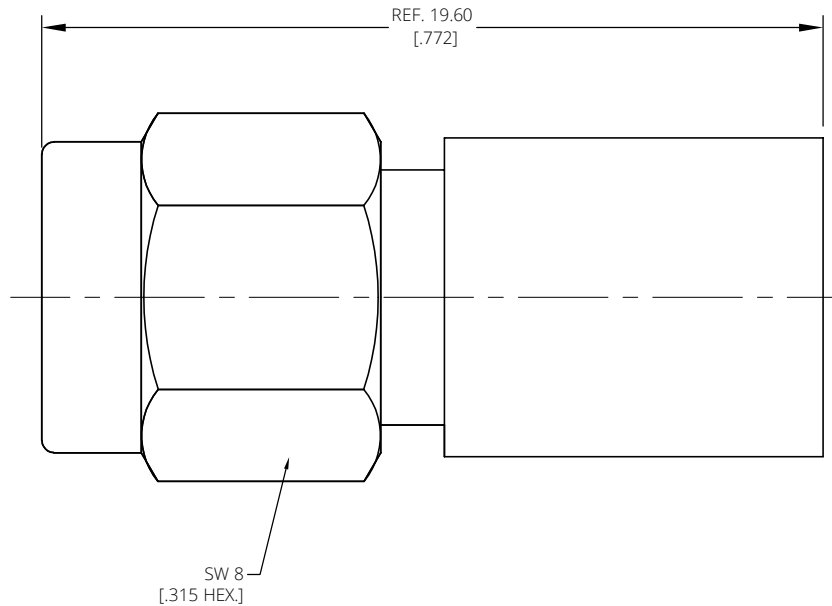

DRAWN	W. Y	DATE	02/20/25
CHECKED	X. Y	DATE	02/20/25
APPROVED	J. Q	DATE	02/20/25
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD	
	XX	±0.13	[.005"]
	X	±0.20	[.008"]
	X	±0.50	[.019"]
	X°	±1°	
	X°	±2°	



TITLE	OPEN CIRCUIT, 2.92MM MALE		
VIEW	PART NO. ANO 2911-6020		

SIZE	SCALE	SHEET	REV.
A3	8:1	1/1	B

4

3

2

1