

4

3

2

1

**MATERIAL & FINISH:**

- 1 BODY: BRASS, GOLD PLATED
- 2 COUPLING NUT: BRASS, GOLD PLATED

**ENVIRONMENTAL DATA:**

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

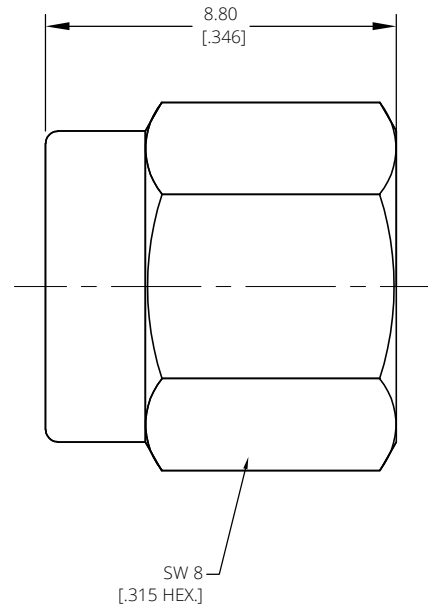
**ELECTRICAL DATA:**

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~40 GHz

**MECHANICAL DATA:**



- 1 CENTER CONTACT: CAPTIVATED
- 2 OUTER CONTACT: SOLDERED

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/10/12	J. Q
B	DRAWING CHANGED	02/20/25	J. Q



DRAWN	W. Y	DATE	02/20/25
CHECKED	X. Y	DATE	02/20/25
APPROVED	J. Q	DATE	02/20/25
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD	
	XX	±0.13 [0.005"]	
	X	±0.20 [0.008"]	
	x	±0.50 [0.019"]	
	⋄	±1°	
	⋄°	±2°	



TITLE			
SHORT CIRCUIT, 2.92MM MALE			
VIEW	PART NO.		
 	ANO 2911-6039		
SIZE	SCALE	SHEET	REV.
A3	8:1	1/1	B

4

3

2

1