

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PEI
- 4 SOLDER FERRULE: BRASS, GOLD PLATED



ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~40 GHZ
- 3 VSWR: 1.20 MAX.

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+165°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/11/18	J. QU
B	MATERIAL CHANGED	07/15/19	J. QU
C	CABLE STRIPPING CHANGED	02/14/20	J. QU

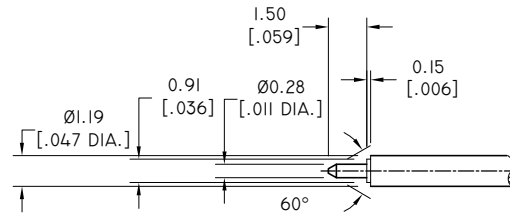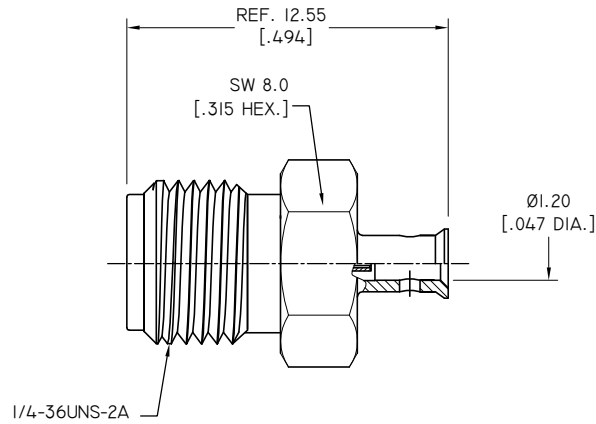

CABLE STRIPPING DIMENSIONS

DRAWN	W. YANG	DATE	02/14/20
CHECKED	X. B. YANG	DATE	02/14/20
APPROVED	J. QU	DATE	02/14/20
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2020 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
2.92MM STRAIGHT FEMALE SOLDER FOR UT-47 CABLE, SOLDER DIRECT			
VIEW	PART NO.		
	ANO 2912-2098		
SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	C

4

3

2

1