

MATERIAL & FINISH:

1. BODY: STAINLESS STEEL, PASSIVATED
2. CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3. INSULATOR: PEI
4. SCREW: STEEL, PASSIVATED






ELECTRICAL DATA:

1. IMPEDANCE: 50 OHMS
2. FREQUENCY RANGE: DC~40 GHz
3. VSWR: 1.30 MAX.

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE: -40°C~+125°C
2. 2011/65/EU (RoHS) AND 2015/863/(RoHS): COMPLIANT
3. 1999/45/EC (REACH): COMPLIANT

| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 09/15/20 | J QU |
| B | ADDED SCREW | 09/30/20 | J QU |
| C | CHANGED DRAWING | 05/10/21 | J QU |

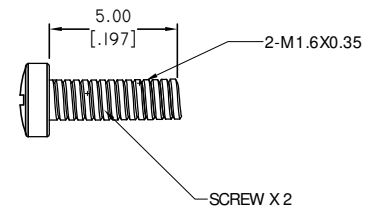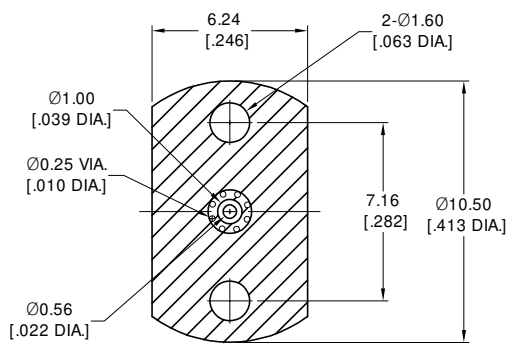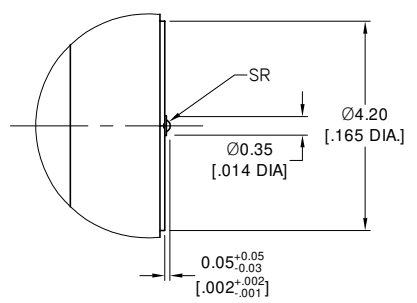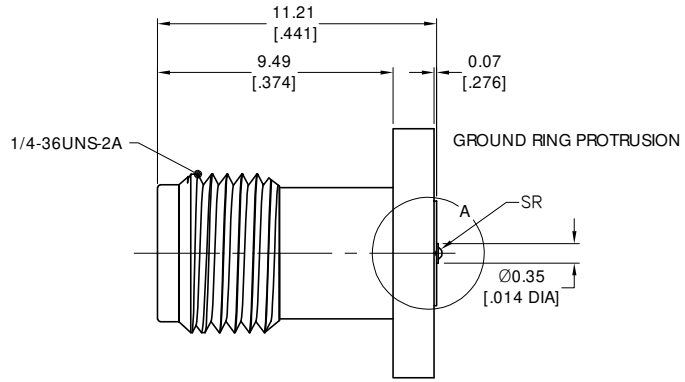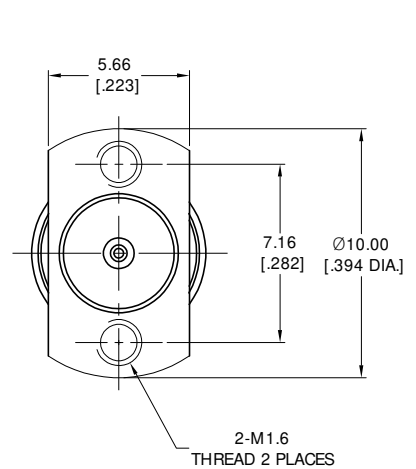

| | | | |
|---|----------------|--|----------|
| DRAWN | W. YANG | DATE | 05/10/21 |
| CHECKED | L. YANG | DATE | 05/10/21 |
| APPROVED | J QU | DATE | 05/10/21 |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2021 ANOISON ELECTRONICS LTD | |
| XX | ±0.13 [0.005"] | | |
| X | ±0.20 [0.008"] | | |
| X | ±0.50 [0.019"] | | |
| X" | ±1° | | |
| X" | ±2° | | |

ANOISON

TITLE: 2.92MM FEMALE VERTICAL LAUNCH, 2 HOLE FLANGE, COMPRESSION MOUNT

VIEW:

PART NO. ANO 2912-3147

| | | | |
|------|-------|-------|------|
| SIZE | SCALE | SHEET | REV. |
| A3 | 5:1 | 1/1 | C |