

4

3

2

1

**MATERIAL & FINISH:**

1 BODY: BRASS, GOLD PLATED

**ENVIRONMENTAL DATA:**

1 TEMPERATURE RANGE: -55°C~+125°C  
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT  
3 1907/2006/EC(REACH): COMPLIANT


**ELECTRICAL DATA:**

1 IMPEDANCE: 50 Ω  
2 FREQUENCY RANGE: DC~40 GHz

**MECHANICAL DATA:**

1 CENTER CONTACT: CAPTIVATED  
2 OUTER CONTACT: SOLDERED


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/11/12	J. Q
B	DRAWING CHANGED	02/20/25	J. Q

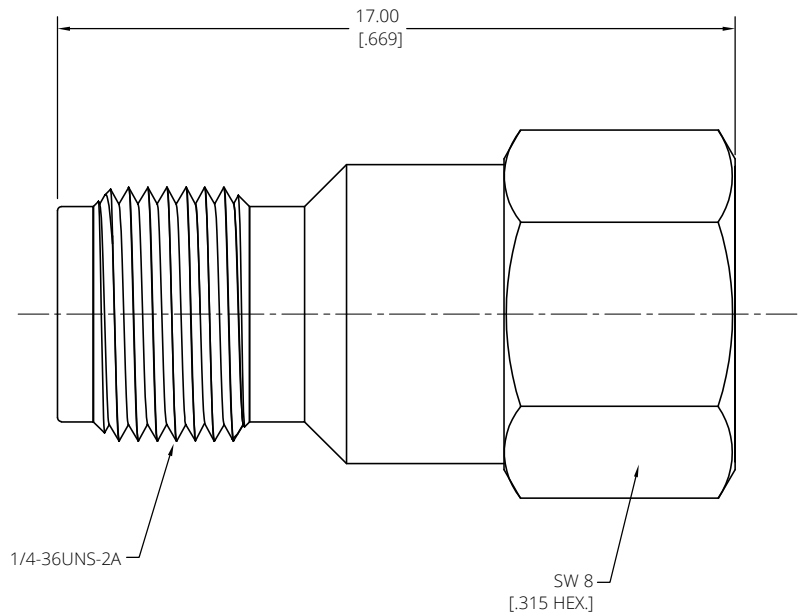

DRAWN	W. Y	DATE	02/20/25
CHECKED	X. Y	DATE	02/20/25
APPROVED	J. Q	DATE	02/20/25
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD	
	XX	±0.13 [005"]	
	X	±0.20 [008"]	
	x	±0.50 [019"]	
	°	±1°	
	°	±2°	



TITLE: OPEN CIRCUIT, 2.92MM FEMALE

VIEW: 

PART NO. ANO 2912-6021

SIZE	SCALE	SHEET	REV.
A3	8:1	1/1	B

4

3

2

1