

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, NICKEL PLATED
- 5 FASTENING NUT: BRASS, NICKEL PLATED
- 6 LOCK WASHER: PHOSPHOR BRONZE, NICKEL PLATED
- 7 FERRULE: BRASS, NICKEL PLATED
- 8 GASKET: MVQ (SILICONE RUBBER)

ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -55°C ~ +125°C
- 2 2011/65/EU (RoHS): COMPLIANT
- 3 IP RATING: IP67

ELECTRICAL DATA:


- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~4 GHz

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/19/18	J. QU

FASTENING NUT
SW 16.00
[.630 HEX.]




LOCK WASHER

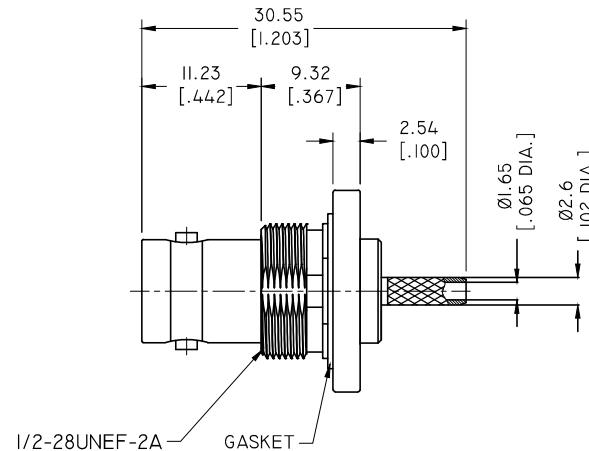


1/2-28UNEF-2A

GASKET



Ø0.60
[.024 DIA.]




10.00
[.394]


Ø3.60
[.142 DIA.]

Ø4.50
[.177 DIA.]


HEX. CRIMP TOOL



CRIMP WIDTH:7.5 [.295]



RECOMMENDED MOUNTING HOLE

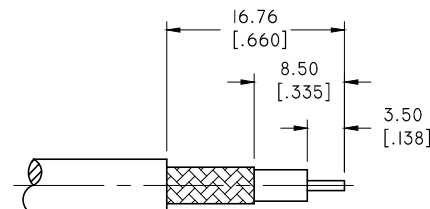


CABLE STRIPPING DIMENSIONS

DRAWN	W. YANG	DATE	03/19/18
CHECKED	X. B. YANG	DATE	03/19/18
APPROVED	J. QU	DATE	03/19/18
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD	
.XX	+0.13 [.005"]		
.X	+0.20 [.008"]		
X	+0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
BNC STRAIGHT WATERPROOF BULKHEAD FEMALE
CRIMP FOR RG316D (DOUBLE SHIELDING) CABLE

VIEW



PART NO.

ANO 3112-1043

SIZE
A3SCALE
2:1SHEET
1/1REV.
A

4

3

2

1