


DESCRIPTION	MATERIAL	FINISH
Center Contact	Beryllium Copper Alloy	Gold
Body	Stainless Steel	Passivated
Coupling Nut	Stainless Steel	Passivated
Insulator	PTFE/PEI	—
Gasket	MVQ (Silicone Rubber)	—



### Technical Data

1. Impedance: 50 Ω
2. Temp. range: -55 °C ~ +165 °C
3. Frequency range: DC~8GHz
4. VSWR: 1.20 max.
5. Durability: 500 Cycles

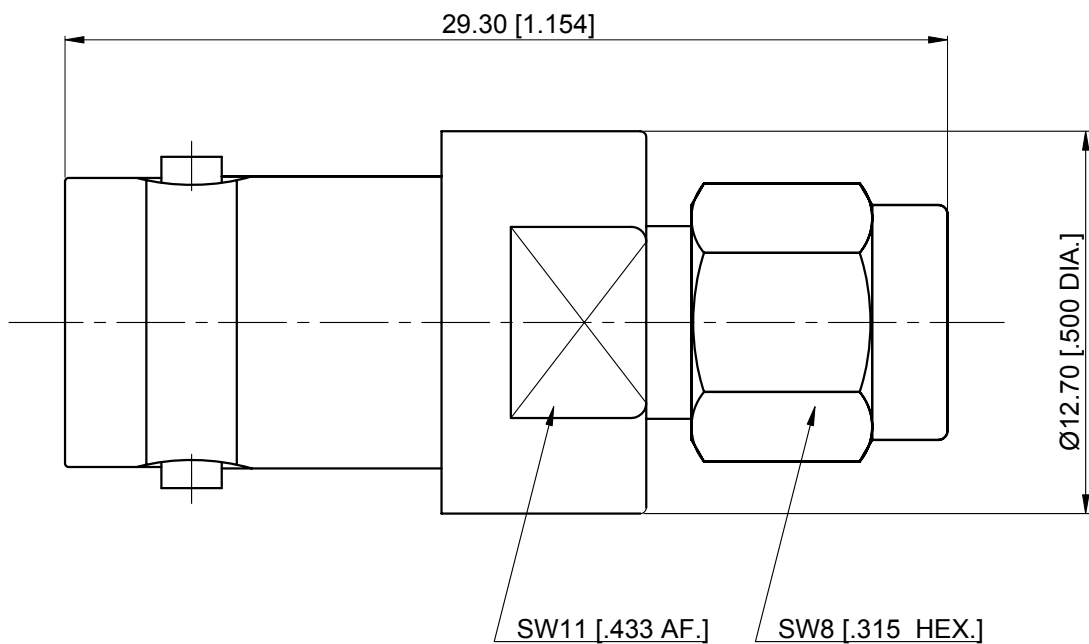

#### NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

				Drawn: L. Yang 10/09/12	Title:  <b>Adapter, BNC Female to SMA Male</b>
				Checked: X. B. Yang 10/09/12	
Description	Ecn.No	Date	Rev	Approved: J. Qu 10/09/12	
 www.anoison.com				Unless otherwise specified dimensions are in millimeters, dimensions in [ ] are in inches for customer reference only. Unless Otherwise Specified tolerance are:	
				.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°	
				View:	Part No: <b>ANO 312-211-1228</b>
					Size: A4    Scale: 4:1    Sheet: 1/1    Rev: A