

MATERIAL & FINISH:

- 1 BODY: SUS316, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: SUS316, PASSIVATED
- 5 BRAID SHIM: BRASS, GOLD PLATED


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~18 GHz
- 3 VSWR: 1.30 MAX.

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -65°C~+155°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/26/16	J. QU

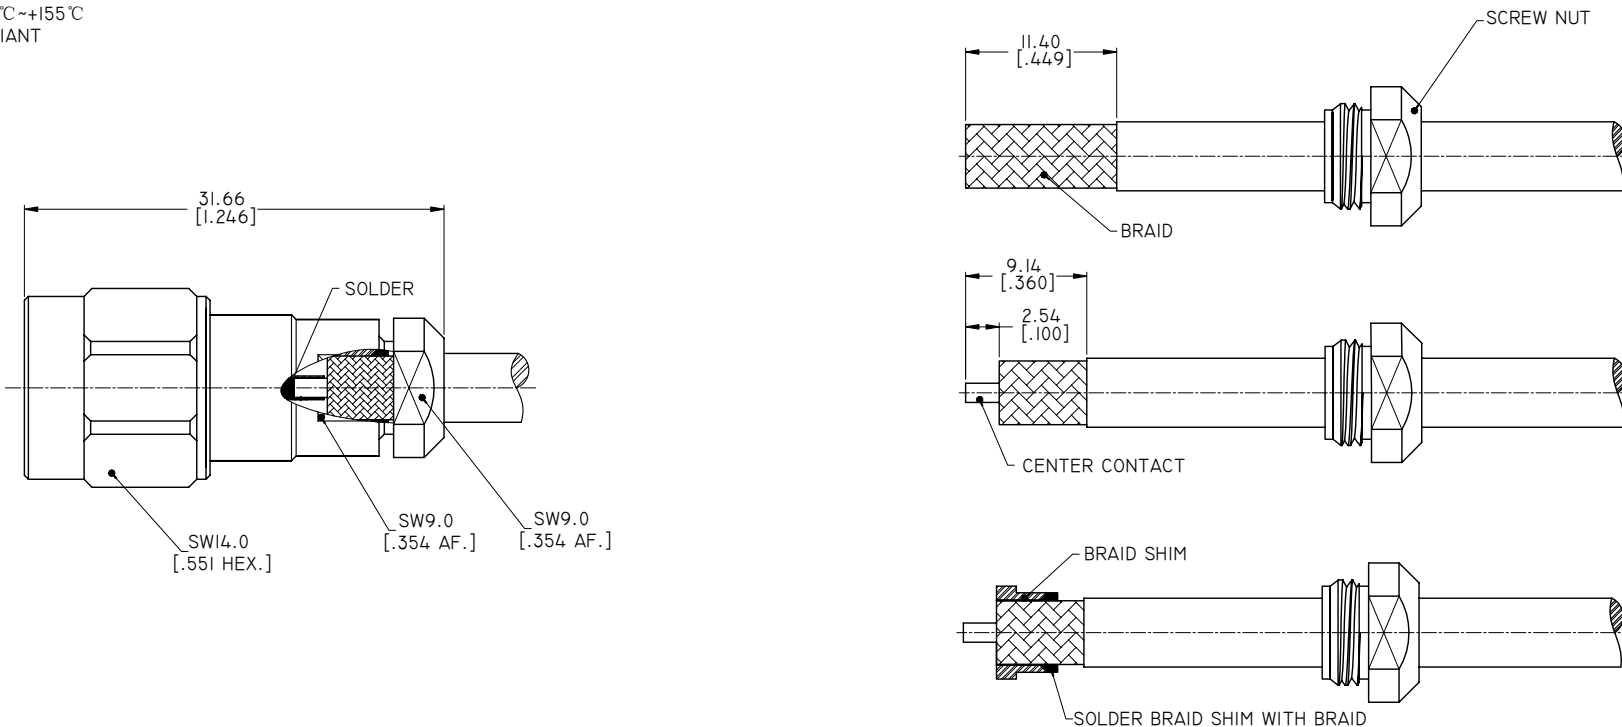

CABLE STRIPPING DIMENSIONS

DRAWN	P. CHEN	DATE	02/26/16
CHECKED	L. YANG	DATE	02/26/16
APPROVED	J. QU	DATE	02/26/16
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2016 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE  
TNC STRAIGHT MALE SOLDER FOR PLEX-210 CABLE

VIEW	PART NO. ANO 3311-2066		
SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A