

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 CRIMP FERRULE: COPPER, NICKEL PLATED
- 4 FASTENING NUT: BRASS, NICKEL PLATED
- 5 LOCK WASHER: PHOSPHOR BRONZE, NICKEL PLATED
- 6 INSULATOR: PTFE

ELECTRICAL DATA:





- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~11 GHZ
- 3 INSULATION RESISTANCE: 5000MΩ
- 4 DIELECTRIC WITHSTANDING VOLTAGE: 1000V

ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS

| REV. | DESCRIPTION | DATE | APPROVED |
|------|------------------------|----------|----------|
| A | INITIAL RELEASE | 02/10/12 | J. QU |
| B | DRAWING FORMAT CHANGED | 08/31/17 | J. QU |

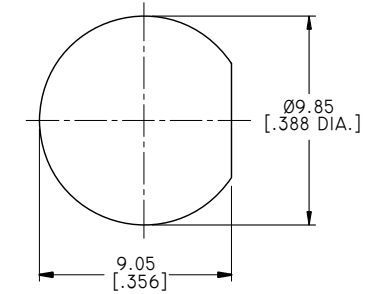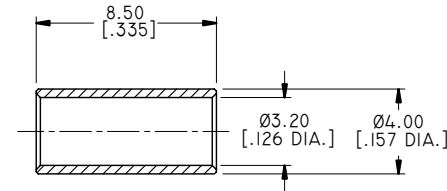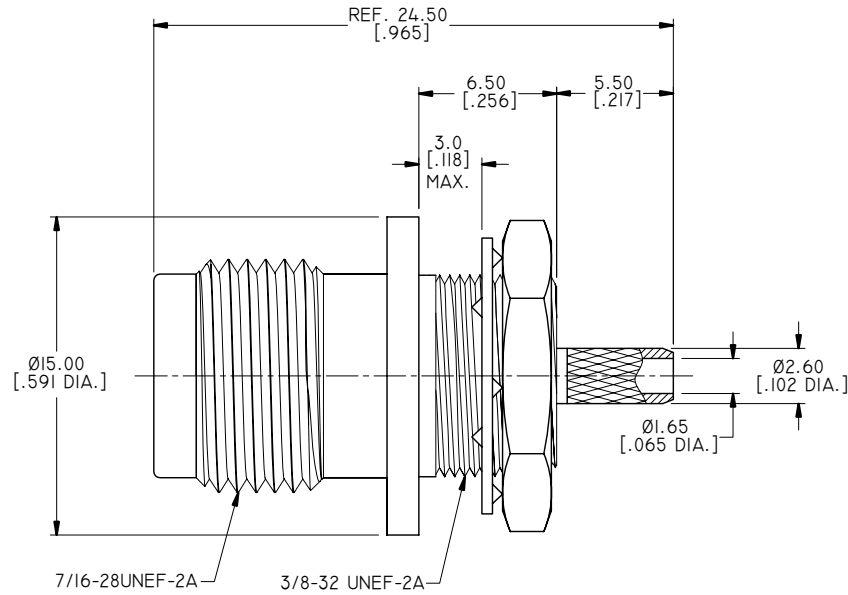


RECOMMENDED MOUNTING HOLE

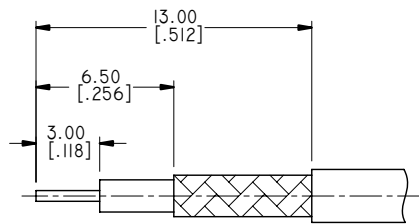

CABLE STRIPPING DIMENSIONS

HEX. CRIMP TOOL



CRIMP WIDTH: 7.5 [.295]

| | | | |
|---|---------------|--|----------|
| DRAWN | X. B. YANG | DATE | 08/31/17 |
| CHECKED | P. CHEN | DATE | 08/31/17 |
| APPROVED | J. QU | DATE | 08/31/17 |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD | |
| .XX | ±0.13 [.005"] | | |
| .X | ±0.20 [.008"] | | |
| X | ±0.50 [.019"] | | |
| .X° | ±1° | | |
| X° | ±2° | | |



TITLE
TNC STRAIGHT FEMALE BULKHEAD CRIMP FOR RG174/RG316/LMR100 CABLE

| | | | | |
|------|------------------------|-------|-------|------|
| VIEW | PART NO. ANO 3312-1035 | | | |
| | SIZE | SCALE | SHEET | REV. |
| | A3 | 4:1 | 1/1 | B |