

MATERIAL & FINISH:

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 COUPLING NUT: BRASS, ALBALOY PLATED
- 4 CRIMP FERRULE: COPPER, NICKEL PLATED
- 5 INSULATOR: PTFE
- 6 GASKET: SILICONE RUBBER






ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-4 GHz
- 3 VSWR: 1.50 MAX.
- 4 WITHSTAND VOLTAGE: 2500 V

ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -55°C ~ +125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

| REVISIONS | | | |
|-----------|---|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 02/29/16 | J. Q |
| B | CHANGED THE SHAPE OF THE COUPLING NUT INSERT TO HEXAGONAL | 05/17/23 | J. Q |

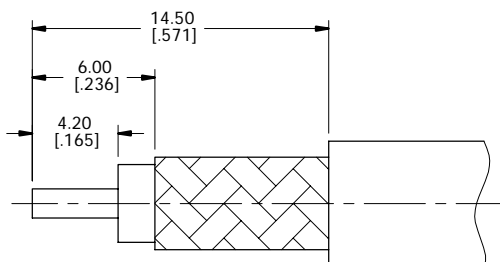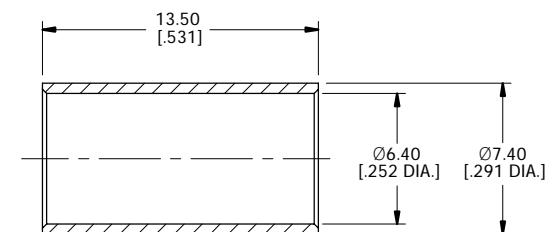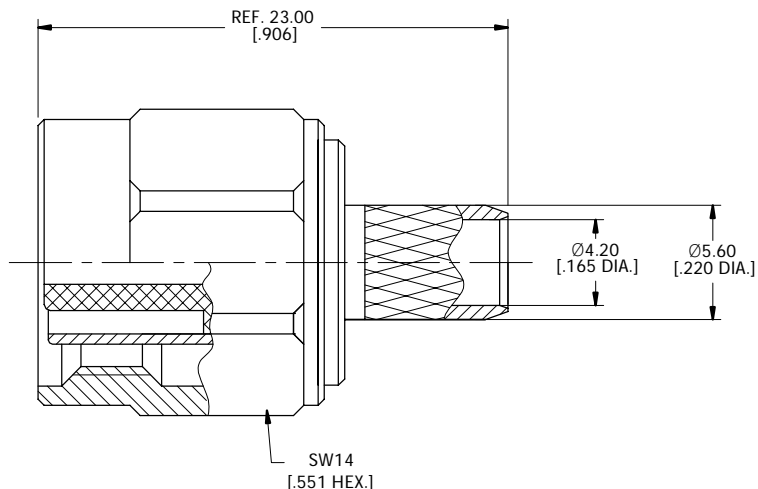

CABLE STRIPPING DIMENSIONS

HEX. CRIMP TOOL



CRIMP WIDTH: 11 [.433]

| | | | |
|----------|------|------|----------|
| DRAWN | X. Y | DATE | 05/17/23 |
| CHECKED | W. Y | DATE | 05/17/23 |
| APPROVED | J. Q | DATE | 05/17/23 |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

| | |
|-----|---------------|
| .XX | ±0.13 [.005"] |
| X | ±0.20 [.008"] |
| X | ±0.50 [.019"] |
| X° | ±1° |
| X" | ±2° |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD



TITLE
RP TNC STRAIGHT MALE CRIMP FOR LMR240 CABLE

| | | | |
|------------|---------------------------|--------------|-----------|
| VIEW | PART NO. ANO 3313-2041 | | |
| SIZE A3 | SCALE 4:1 | SHEET 1/1 | REV. B |