

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 NUT: BRASS, NICKEL PLATED
- 4 LOCK WASHER: PHOSPHOR BRONZE, NICKEL PLATED
- 5 INSULATOR: PTFE


ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~11 GHZ
- 3 VSWR: 1.30 MAX.
- 4 INSULATION RESISTANCE: 5000 MΩ
- 5 VOLTAGE RATING (V.R.M.S.): 335 V
- 6 DIELECTRIC WITHSTANDING VOLTAGE (V.R.M.S.): 500 V

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/04/13	J. QU
B	CENTER CONTACT MATERIAL CHANGED	08/01/13	J. QU
C	FREQUENCY RANGE CHANGED	02/24/18	J. QU
D	ELECTRICAL DATA ADDED	02/28/18	J. QU

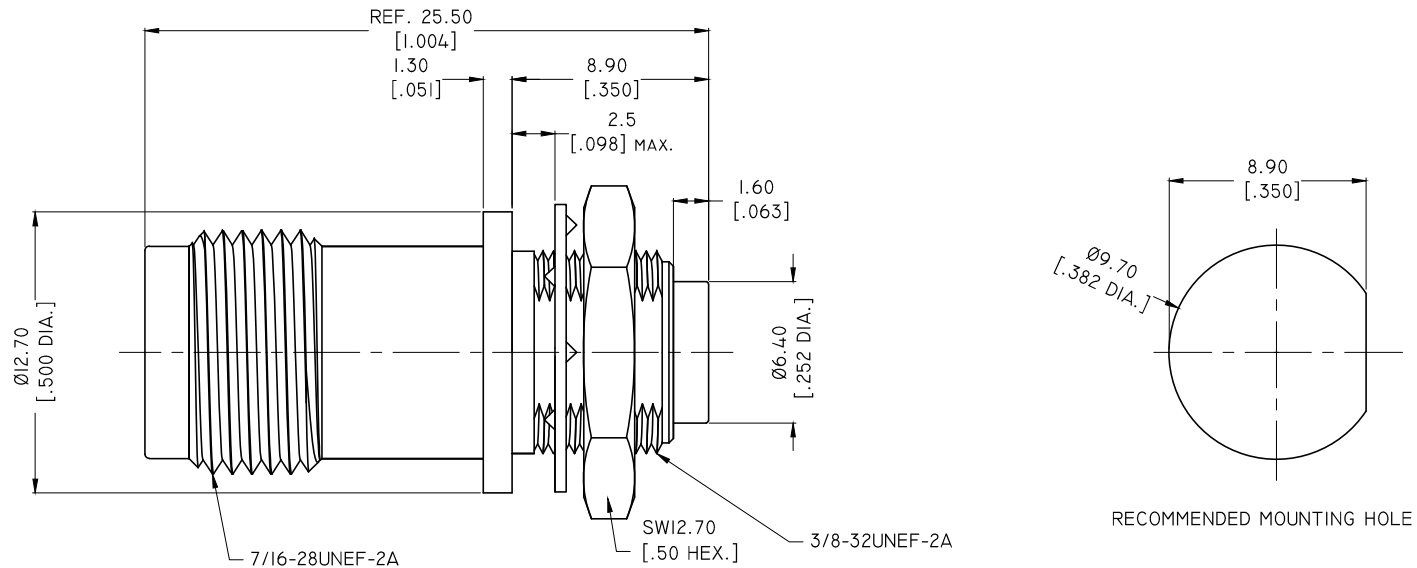

DRAWN	W. YANG	DATE	02/28/18
CHECKED	L. YANG	DATE	02/28/18
APPROVED	J. QU	DATE	02/28/18
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD	
.XX	+0.13 [0.005"]		
.X	+0.20 [0.008"]		
X	+0.50 [0.019"]		
.X°	±1°		
X°	±2°		



TITLE ADAPTER, TNC FEMALE TO SMP MALE BULKHEAD, LIMITED DETENT			
VIEW	PART NO. ANO 332-931-1270		
SIZE A3	SCALE 4:1	SHEET 1/1	REV. D

4

3

2

1