

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS NICKEL PLATED
- 5 O-RING: SILICONE RUBBER


ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C ~ +125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-300 MHz
- 3 VOLTAGE RATING: 500 VRMS MAX.
- 4 DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS MAX.
- 5 INSULATION RESISTANCE: 5000 MΩ MIN.
- 6 CONTACT RESISTANCE:
 CENTER CONTACT: 2.0 mΩ MAX.
 OUTER CONTACT: 1.0 mΩ MAX.

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/10/23	J. Q

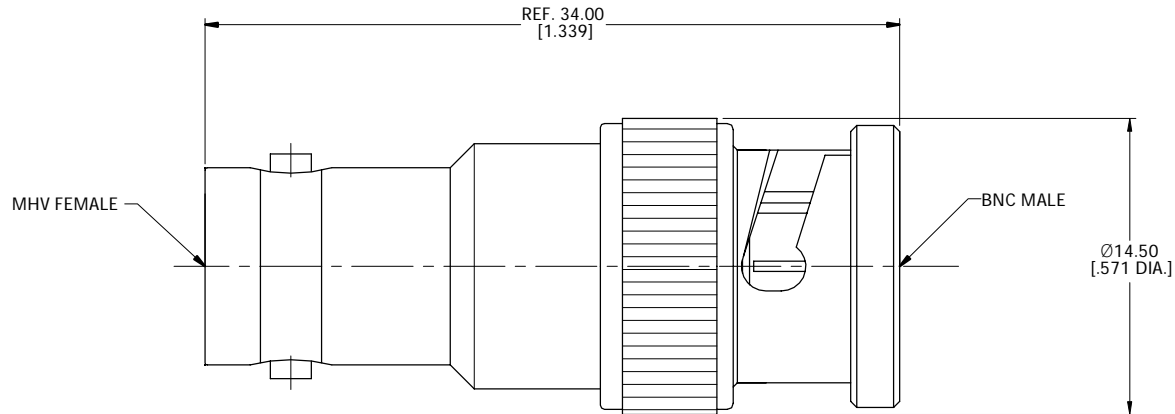

DRAWN	X. Y	DATE	02/10/23
CHECKED	W. Y	DATE	02/10/23
APPROVED	J. Q	DATE	02/10/23

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
X°	±1°
X"	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD



TITLE
ADAPTER, MHV FEMALE TO BNC MALE

VIEW	PART NO. ANO 392-311-1617		
	SIZE A3	SCALE 4:1	SHEET 1/1
			REV. A