


DESCRIPTION	MATERIAL	FINISH
Center Contact	Phosphor Bronze	Gold
Body	Brass	Nickel
Coupling Nut	Brass	Nickel
Insulator	PTFE	—
Gasket	MVQ (Silicone Rubber)	—

Technical Data

1. Impedance: 75 Ω
2. Temp. Range: -55℃~+125℃
3. Frequency Range: DC~1150MHz
4. VSWR : ≤1.30
5. 2002/95/EC(RoHS): Compliant

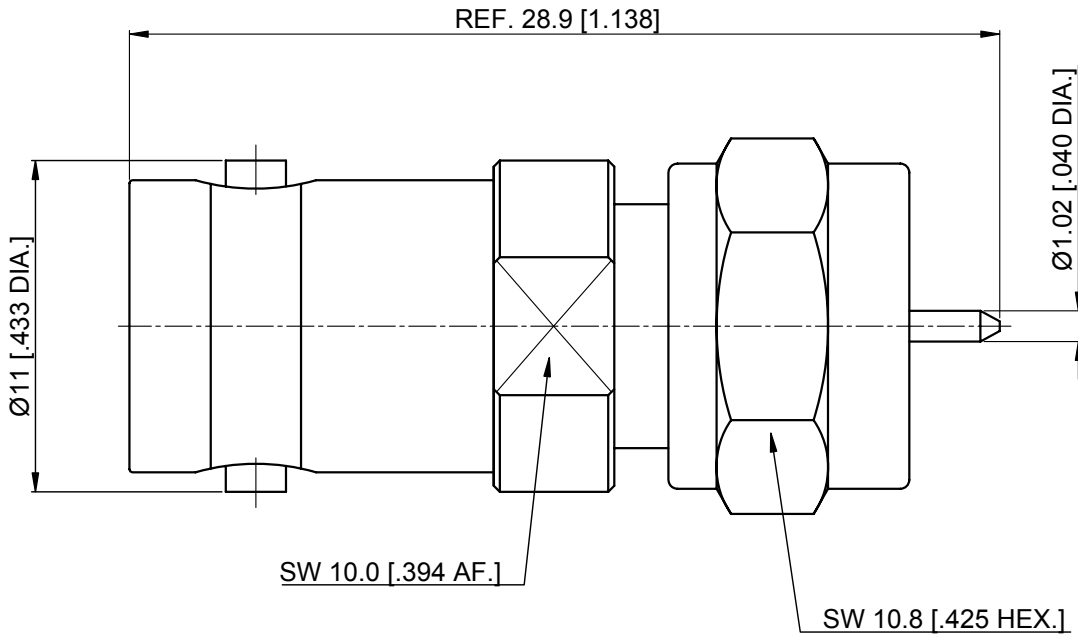

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

				Drawn: L. Yang 11/29/12	Title: Adapter, 75 Ohms BNC Female to F Male (male pin OD=1.02)			
				Checked: X. B. Yang 11/29/12				
				Approved: J. Qu 11/29/12				
Description	Ecn.No	Date	Rev	Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only. Unless Otherwise Specified tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°				
				View:		Part No:		
						ANO 402-971-1246		
Size: A4		Scale: 4:1		Sheet: 1/1		Rev: A		