

MATERIAL & FINISH

- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 MIDDLE CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 4 FASTENING NUT: BRASS, NICKEL PLATED
- 5 LOCK WASHER: BRASS, NICKEL PLATED
- 6 HERMETIC SEAL: CORNING 7070 GLASS, GOLD PLATED SS
- 7 INSULATOR: PTFE
- 8 GASKET: SILICONE RUBBER




ELECTRICAL SPECIFICATIONS:

- 1 WORKING VOLTAGE: 400 VRMS
- 2 FREQUENCY RANGE: DC~500 MHZ

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT
- 4 LEAKAGE RATE SHALL NOT EXCEED 10⁻⁶ ;CC OF TRACER GAS AT ATMOSPHERIC PRESSURE

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/11/15	J. QU
B	DRAWING FORMAT CHANGED	12/27/17	J. QU
C	1. 2015/863/(RoHS): COMPLIANT ADDED 2. 1999/45/EC(REACH): COMPLIANT ADDED	10/31/18	J. QU

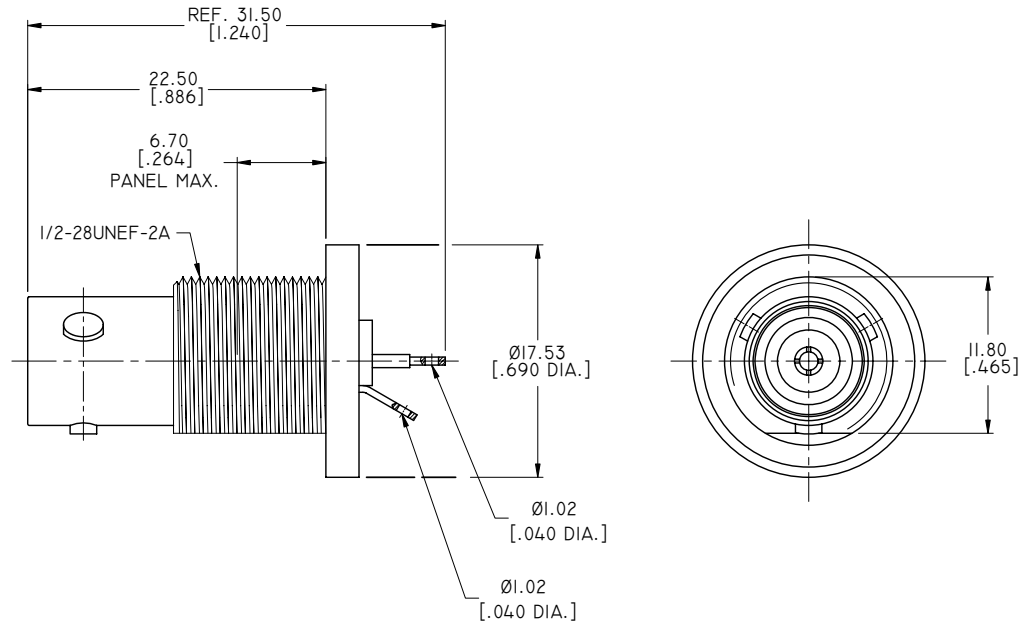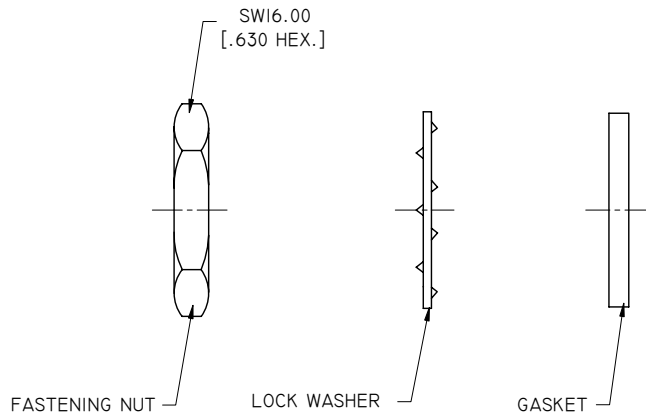

RECOMMENDED MOUNTING HOLE

NOETS:
FASTENING NUT, LOCK WASHER AND GASKET INDIVIDUALLY PACKED

DRAWN	X. B. YANG	DATE	10/31/18
CHECKED	W. YANG	DATE	10/31/18
APPROVED	J. QU	DATE	10/31/18
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
TRIAx BNC STRAIGHT BULKHEAD FEMALE RECEPTACLES WITH SOLDER END, HERMETIC SEAL			
VIEW		PART NO.	
		ANO 4212-5007	
SIZE	SCALE	SHEET	REV.
A3	2.5:1	I/1	C