MATERIAL & FINISH
1. BODY: BRASS, NICKEL PLATED
2. CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
3. FASTENING NUT: BRASS, NICKEL PLATED
4. LOCK WASHER: PHOSPHOR BRONZE, NICKEL PLATED
5. INSULATOR: PTFE
6. O-RING: MVQ(SILICONE RUBBER)

ELECTRICAL SPECIFICATIONS:
1. WORKING VOLTAGE: 800 VRMS
2. FREQUENCY RANGE: DC~500 MHz

ENVIRONMENTAL DATA:
1. TEMPERATURE RANGE: -45℃~+85℃
2. 2011/65/EU (RoHS) AND 2015/863/(RoHS): COMPLIANT
3. 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/21/18	J. QU

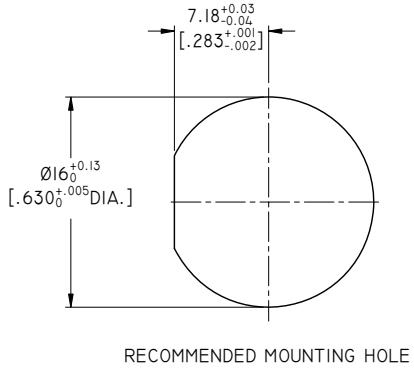

RECOMMENDED MOUNTING HOLE

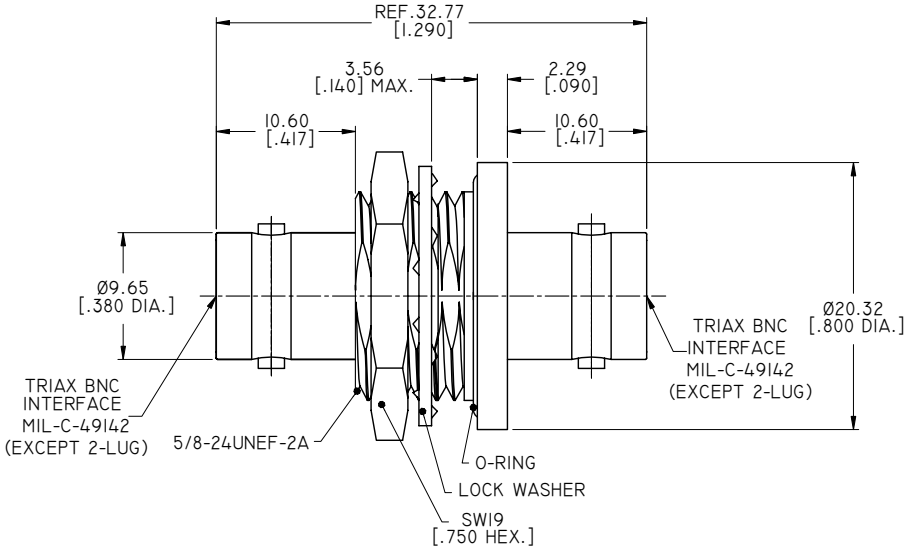



DRAWN	P. CHEN	DATE 09/21/18
CHECKED	L. YANG	DATE 09/21/18
APPROVED	J. QU	DATE 09/21/18

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005'']
.X	±0.20 [.008'']
X	±0.50 [.019'']
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD

ANOISON
...we create connection for technologies

TITLE
ADAPTER, BULKHEAD MOUNT ISOLATED GROUND TRIAX BNC FEMALE TO TRIAX BNC FEMALE, 2-LUG

VIEW

PART NO. ANO 422-422-1469

SIZE	SCALE	SHEET	REV.
A3	2.5:1	1/1	A