

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/13/17	J. QU

MATERIAL & FINISH:




- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BRASS, SILVER PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, ALBALOY PLATED
- 5 GASKET: SILICONE RUBBER

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC-12 GHZ
- 3 VSWR: ≤ 1.25 AT DC-6 GHZ
- 4 PIM: ≤ -160DBC (2X43dBm) AT 900 MHZ

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C ~ +125°C
- 2 2011/65/EU (RoHS): COMPLIANT

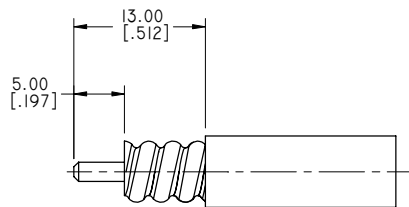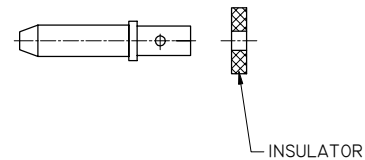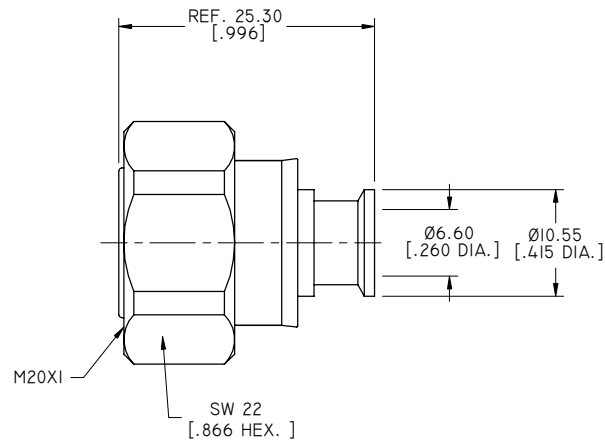


CABLE STRIPPING DIMENSIONS

DRAWN	P. CHEN	DATE	02/13/17
CHECKED	L. YANG	DATE	02/13/17
APPROVED	J. QU	DATE	02/13/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
SCREW 4.3-10 STRAIGHT MALE SOLDER/SOLDER FOR 1/4" SUPER FLEX CABLE

VIEW



PART NO.
ANO 4711-2027

SIZE	SCALE	SHEET	REV.
A3	2:1	1/1	A