

4

3

2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/23/17	J. QU

MATERIAL & FINISH:



- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BRASS, SILVER PLATED
- 3 INSULATOR: PTFE

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 OHMS
- 2 FREQUENCY RANGE: DC-12 GHZ
- 3 VSWR: ≤ 1.25 AT DC-6 GHZ
- 4 PIM: ≤ -160DBC (2X43DBM)

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C ~ +125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT

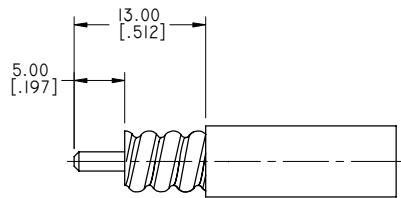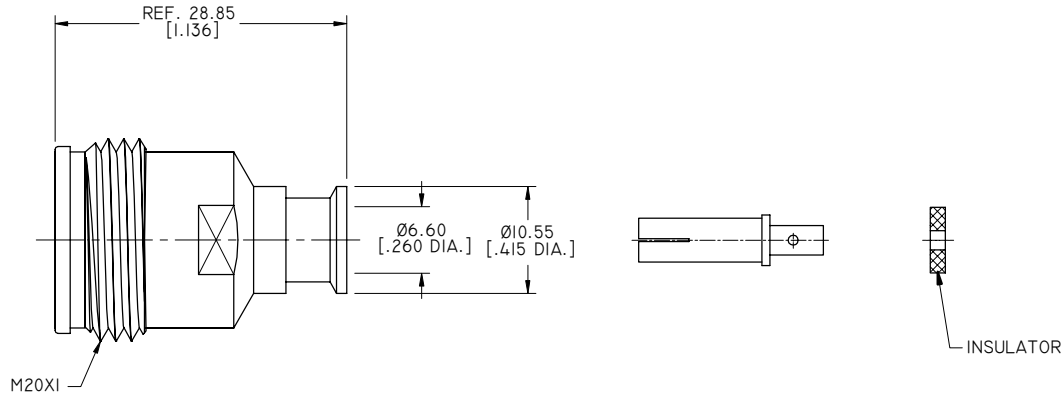

CABLE STRIPPING DIMENSIONS

DRAWN	P. CHEN	DATE	02/23/17
CHECKED	L. YANG	DATE	02/23/17
APPROVED	J. QU	DATE	02/23/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"		
.X	±0.20 [.008"		
X	±0.50 [.019"		
.X°	±1°		
X°	±2°		



TITLE
4.3-10 STRAIGHT FEMALE SOLDER/SOLDER FOR 1/4" SUPER FLEX CABLE

VIEW	PART NO. ANO 4712-2028		
	SIZE A3	SCALE 2:1	SHEET 1/1
	REV. A		

4

3

2

1