



REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/30/23	J. Q

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT
- 4 WEIGHT: 25Kg

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~4 GHz
- 3 VSWR: 1.25 MAX.
- 4 AVERAGE POWER: MAXIMUM POWER 1000 WATTS AVERAGE TO 25°C AMBIENT TEMPERATURE, DERATED LINEARLY TO 100W @ 125°C
- 5 PEAK POWER: MAXIMUM POWER 6 KW (5μS PULSE WIDTH WITH THE MAXIMUM 10% DUTY CYCLE)

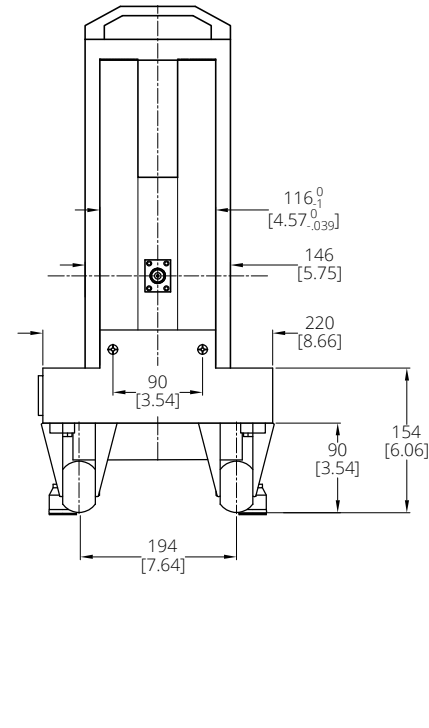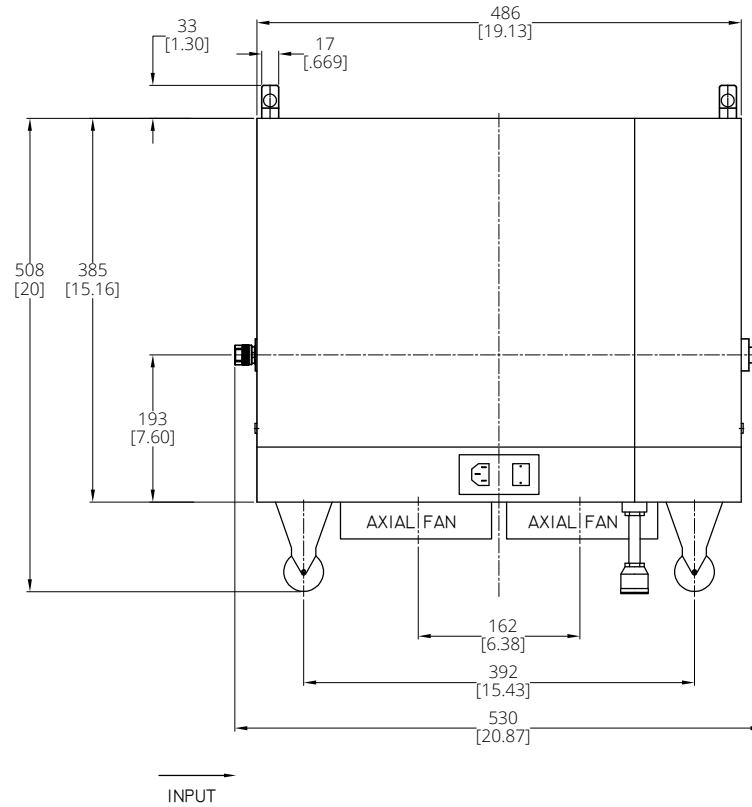

PART NO.	ATTENUATION VALUES & ACCURACY			
	ANO 51-100001-XX	20 DB ±3.0 DB	30 DB ±2.5 DB	40 DB ±2.5 DB

NOTE: XX REFER TO ATTENUATION VALUE IN DB

DRAWN	W. Y	DATE	10/27/23
CHECKED	X. Y	DATE	10/27/23
APPROVED	J. Q	DATE	10/27/23

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

XX	±0.13 [0.005"]
X	±0.20 [0.008"]
X	±0.50 [0.019"]
X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD



TITLE			
ATTENUATOR, N MALE TO FEMALE 1000 WATTS UNI DIRECTIONAL, DC~4GHz			
VIEW	PART NO. ANO 51-100001-XX		
	SIZE A3	SCALE 1:2	SHEET 1/1
			REV. A