

4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/25/24	J. Q

MATERIAL & FINISH:


- 1 BODY: BRASS, NICKEL PLATED
- 2 RADIATOR: ALUMINIUM, BLACK

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-12.4GHZ
- 3 VSWR: 1.35 MAX.
- 4 AVERAGE POWER: MAXIMUM POWER 100 WATTS AVERAGE TO 25°C AMBIENT TEMPERATURE, DERATED LINEARLY TO 10W @ 125°C
- 5 PEAK POWER: MAXIMUM POWER 1000 W (5μS PULSE WIDTH WITH THE MAXIMUM 2% DUTY CYCLE)
- 6 ATTENUATOR ACCURACY: SEE TABLE

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(ROHS) AND 2015/863/(ROHS): COMPLIANT
- 3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT

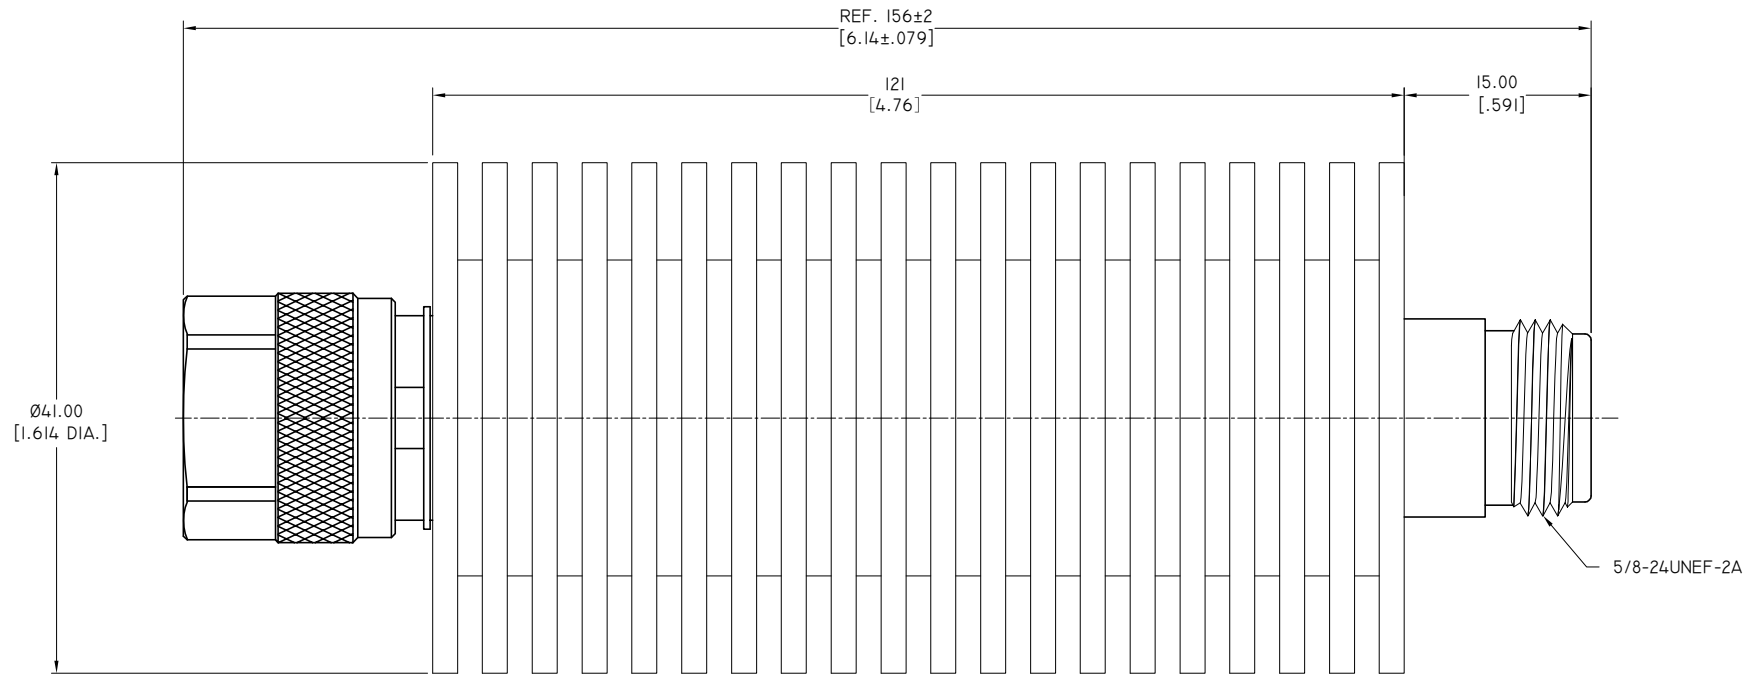

PART NO.	ATTENUATION VALUES & ACCURACY				
	6~10 DB	11~20 DB	21~30 DB	31 DB~40DB	41 DB~50DB
ANO 51-10005-XX	±1.2 DB	±0.9 DB	±1.0 DB	±1.0 DB	±1.1 DB

NOTE: XX REFER TO ATTENUATION VALUE IN DB

DRAWN	W. Y	DATE	09/25/24
CHECKED	X. Y	DATE	09/25/24
APPROVED	J. Q	DATE	09/25/24
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT ©2024 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.25 [.010"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
ATTENUATOR N MALE TO N FEMALE 100 WATTS BIDIRECTIONAL, DC-12.4GHZ			
VIEW	PART NO.		
	ANO 51-10005-XX		
SIZE	SCALE	SHEET	REV.
A3	5:1	1/1	A

4 3 2 1