

4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/15/23	J. Q

MATERIAL & FINISH



- 1 CONNECTOR BODY: BRASS, NICKEL PLATING
- 2 CENTER CONTACT: BRONZE, SILVER PLATED
- 3 INSULATOR: PTFE
- 4 RADIATOR: ALUMINIUM, BLACK

ENVIRONMENTAL DATA:

- 1 OPERATING TEMPERATURE RANGE: -55°C~+100°C
- 2 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~8 GHz
- 3 VSWR: 1.25 MAX.
- 4 AVERAGE POWER: 150 WATTS AVERAGE TO 25°C AMBIENT TEMPRATRUE, DERATED LINEARLY TO 15W @ 100°C

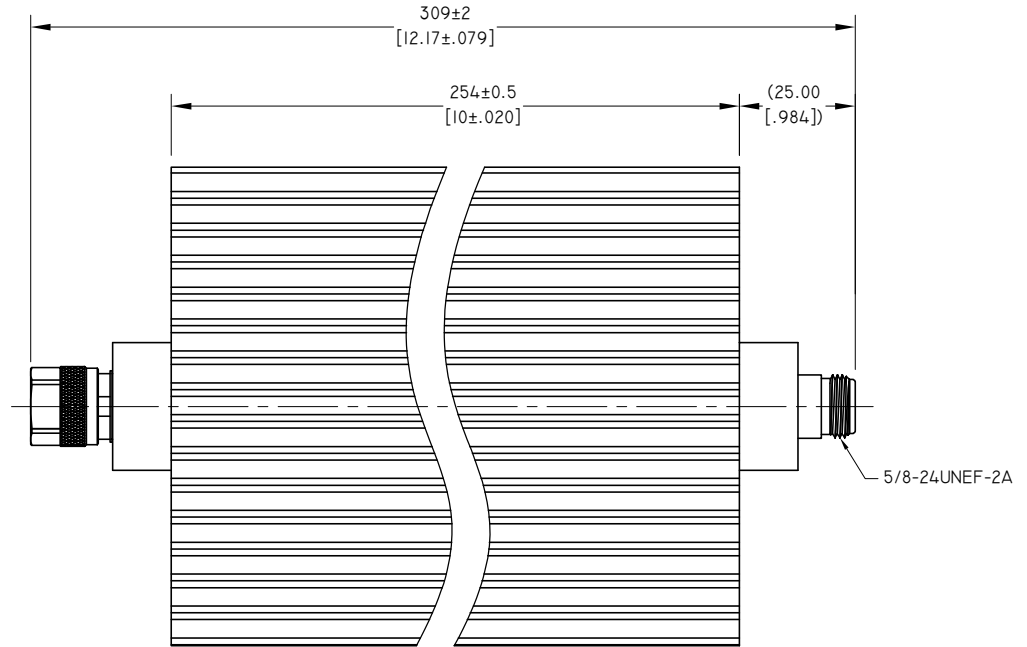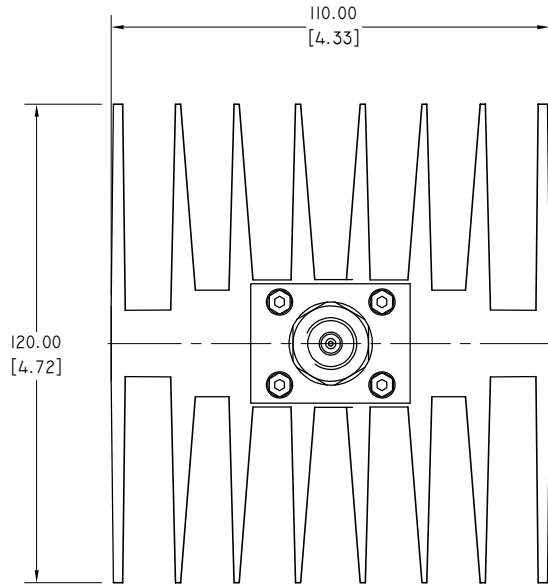

PART NO. ANO 51-15005-XX	ATTENUATION VALUES & ACCURACY				
	10 DB	20 DB	30 DB	40 DB	50-60 DB
	±1.5 DB	±1.5 DB	±0.9 DB	±0.9 DB	±0.9 DB

NOTE: XX REFER TO ATTENUATION VALUE IN DB

DRAWN	W. Y	DATE	09/15/23
CHECKED	X. Y	DATE	09/15/23
APPROVED	J. Q	DATE	09/15/23



UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
X°	±1°
X"	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD

TITLE ATTENUATOR, N MALE TO FEMALE 150 WATTS BIDIRECTIONAL, DC-8GHZ			
VIEW	PART NO. ANO 51-15005-XX		
	SIZE A3	SCALE 1:1	SHEET 1/1
		REV. A	

4 3 2 1