MATERIAL & FINISH:

1 BODY: STAINLESS STEEL, PASSIVATED
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 INSULATOR: PTFE
4 GASKET: SILICONE RUBBER

ELECTRICAL DATA:

1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~11 GHz
3 VSWR: 1.25 MAX.
4 INSERTION LOSS: 0.3 DB MAX.

ENVIRONMENTAL DATA:

1 TEMPERATURE RANGE: -55℃~+125℃
2 2015/863/(RoHS): COMPLIANT
3 1907/2006/EC(REACH) AND 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/27/23	J. Q

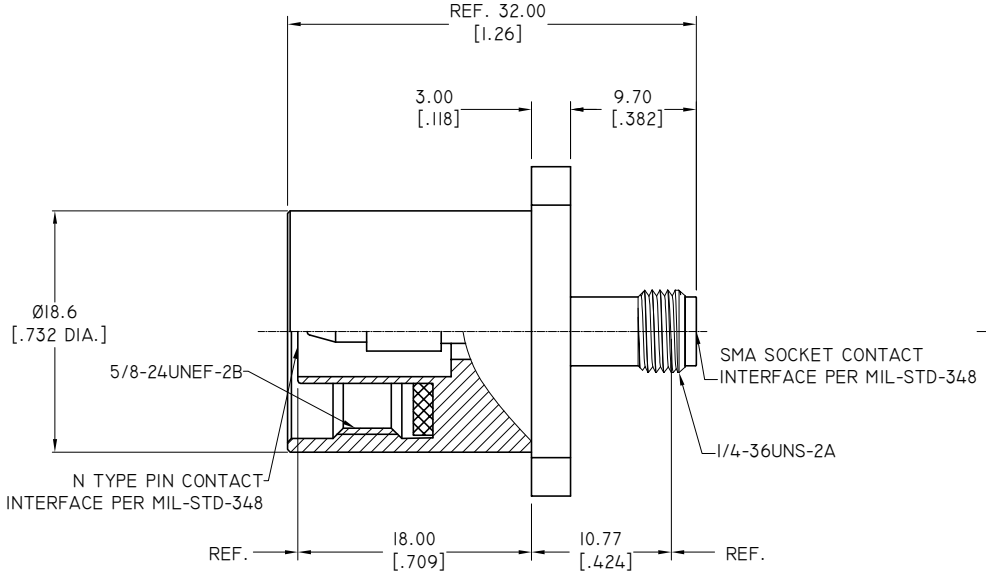

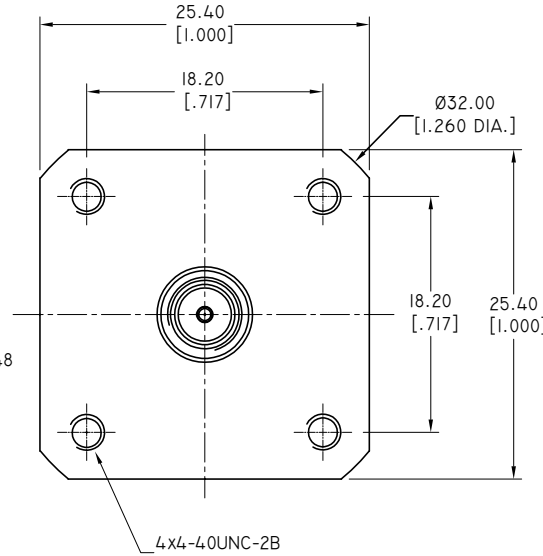

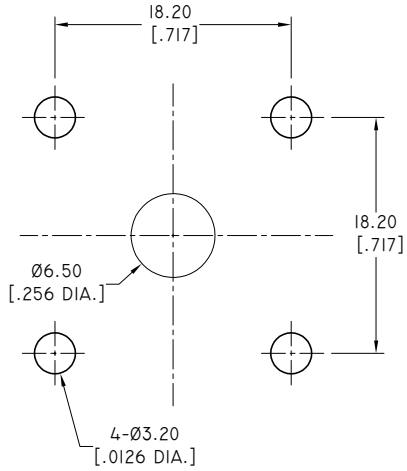

RECOMMENDED MOUNTING HOLE

DRAWN	W. Y	DATE 06/27/23
CHECKED	X. Y	DATE 06/27/23
APPROVED	J. Q	DATE 06/27/23

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED
TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD

ANOISON

TITLE

ADAPTER, N MALE TO SMA FEMALE, 4 HOLE FLANGE, NON-ROTATING COUPLING NUT

VIEW

PART NO. ANO 511-212-1634

SIZE	SCALE	SHEET	REV.
A3	2.5:1	1/1	A