


DESCRIPTION	MATERIAL	FINISH
Center Contact	Brass	Gold
Body	Brass	Nickel
Retaining Ring	Phosphor Bronze	Nickel
Coupling Nut	Brass	Nickel
Gasket	MVQ (Silicone Rubber)	_____
Insulator	PTFE	_____

TECHNICAL DATA

1. Impedance: 50 Ω
2. Temp. range: -40~+85 °C
3. Frequency range: 0~6 GHz
4. VSWR: ≤1.30

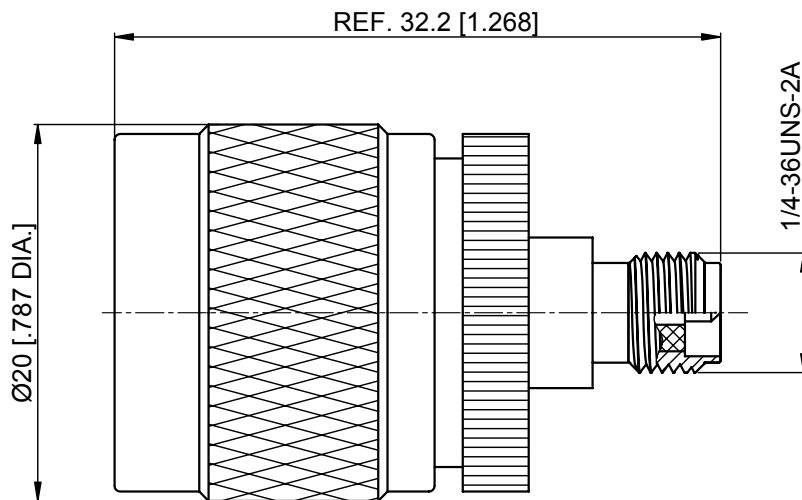

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

Added technical data	_____	12/29/12	D	Drawn: L. Yang 12/29/12
structure Changed	_____	08/27/11	C	Checked: X.B. Yang 12/29/12
Description	Ecn.No	Date	Rev	Approved: J. Qu 12/29/12

Title:

Adapter, N Male to RP SMA Female



Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only.

Unless Otherwise Specified tolerance are:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

View:



Part No:

ANO 511-214-1010

Size:	Scale:	Sheet:	Rev:
A4	2.5:1	1/1	D