

Material & Finish:

- 1 Body: Brass, Nickel plated
- 2 Center Contact: Phosphor bronze, Gold plated
- 3 Insulator: PTFE


Electrical Data:

- 1 Impedance: 50 Ω-75 Ω
- 2 Frequency Range: DC-3 GHz
- 3 VSWR: 1.20 MAX.
- 4 Insertion Loss: 5.70±0.50 dB

Environmental Data:

- 1 Temperature Range: -55°C to +155°C
- 2 2011/65/EU(ROHS) and 2015/863/(ROHS): Compliant
- 3 1907/2006/EC(REACH): Compliant

Revisions			
Rev.	Description	Date	Approved
A	Initial Release	04/23/26	J. Q

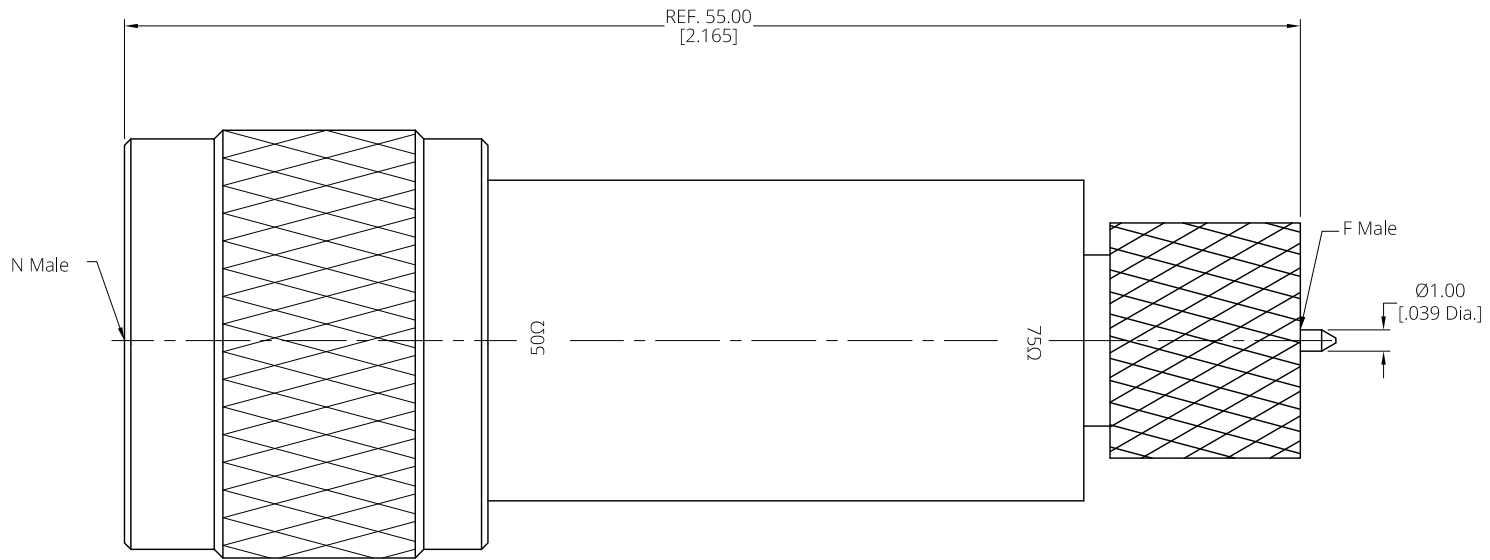

Drawn	Y. H	Date	04/23/26
Checked	P. C	Date	04/23/26
Approved	J. Q	Date	04/23/26
Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only unless otherwise specified tolerance are:		These drawings and specifications are the property of ANOISON GROUP. They shall not be reproduced or used without written permission. © 2026 ANOISON GROUP. All rights reserved.	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



Title				
Adapter, N 50Ω Straight Male to F 75Ω Male				
View		Part No.		
		ANO 511-971-1745		
Size	Scale	Sheet	Rev.	
A3	4:1	1/1	A	

NOTE: Specifications are subject to change without notice.
Contact us for the latest data before finalizing your design.