

MATERIAL & FINISH:

- 1 BODY: BRASS, SEE TABEL
- 2 CENTER CONTACT: BRASS, SEE TABEL
- 3 COUPLING NUT: BRASS, SEE TABEL
- 4 RETAINING RING: PHOSPHOR BRONZE, UNPLATED
- 5 CRIMP FERRULE: COPPER, NICKEL PLATED
- 6 INSULATOR: PTFE
- 7 GASKET: SILICONE RUBBER





ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHZ
- 3 VSWR: 1.20 MAX. AT DC~3 GHZ
1.30 MAX. AT 3~6 GHZ

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
F	MATERIAL AND FINISH ADDED	02/13/14	J. QU
G	MATERIAL AND FINISH CHANGED	07/28/17	J. QU

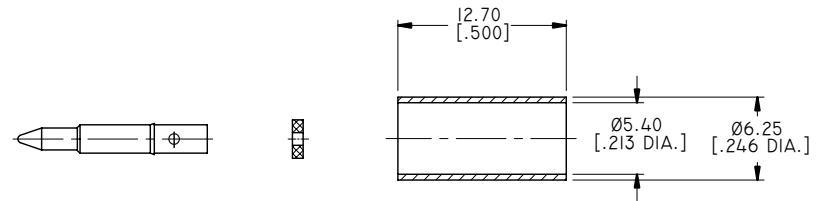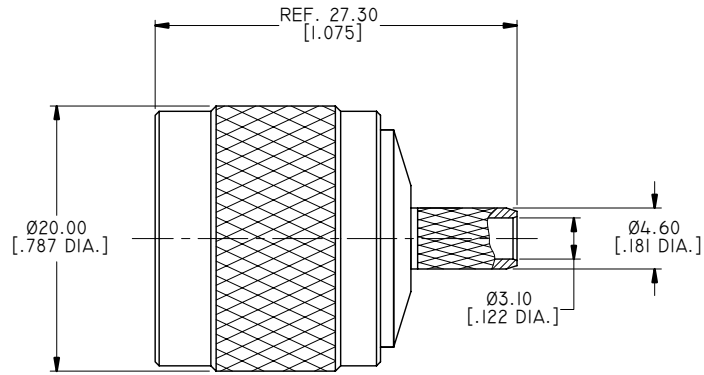

TABEL

PART NO.	PART	FINISH
ANO 5111-2048	BODY/COUPLING NUT	NICKEL
	CENTER CONTACT	GOLD
ANO 5111-2048-1	BODY/COUPLING NUT	ALBALOY
	CENTER CONTACT	SILVER

DRAWN	X. B. YANG	DATE	07/28/17
CHECKED	P. CHEN	DATE	07/28/17
APPROVED	J. QU	DATE	07/28/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE N STRAIGHT MALE CRIMP FOR LMRI95/RG58 CABLE				
VIEW 		PART NO. ANO 5111-2048		
SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. G	