

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, NICKEL PLATED
- 5 RETAINING RING: PHOSPHOR BRONZE, NICKEL PLATED
- 6 GASKET: MVQ (SILICONE RUBBER)




ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~11 GHZ
- 3 VSWR: 1.30 MAX. AT DC~3 GHZ
1.50 MAX. AT 3~6 GHZ

ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -65°C ~ +125°C
- 2 2011/65/EU (RoHS): COMPLIANT

| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 11/18/15 | J. QU |

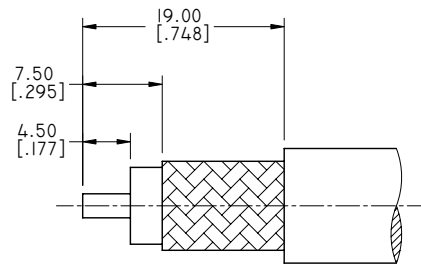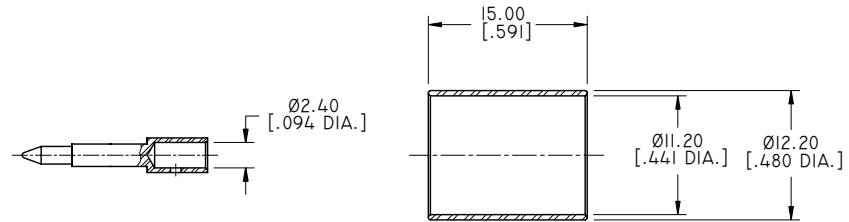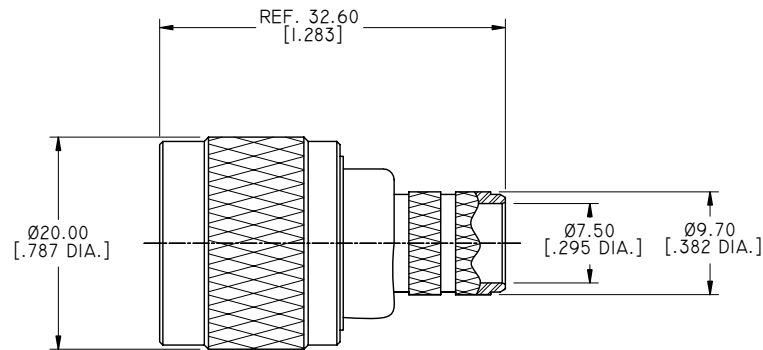

CABLE STRIPPING DIMENSIONS

HEX. CRIMP TOOL



CRIMP WIDTH: 12.0 [.472]

| | | | |
|---|---------------|--|----------|
| DRAWN | P. CHEN | DATE | 11/18/15 |
| CHECKED | L. YANG | DATE | 11/18/15 |
| APPROVED | J. QU | DATE | 11/18/15 |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD | |
| .XX | ±0.13 [.005"] | | |
| .X | ±0.20 [.008"] | | |
| X | ±0.50 [.019"] | | |
| .X° | ±1° | | |
| X° | ±2° | | |



TITLE
N MALE STRAIGHT CRIMP FOR RG214 CABLE

| | | | |
|------|---------------------------|--------------|--------------|
| VIEW | PART NO. ANO 5111-2146 | | |
| | SIZE A3 | SCALE 2:1 | SHEET 1/1 |
| | | REV. A | |

4

3

2

1