

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: BRASS, GOLD PLATED
- 3 COUPLING NUT: BRASS, NICKEL PLATED
- 4 RETAINING RING: PHOSPHOR BRONZE, UNPLATED
- 5 CRIMP FERRULE: COPPER, NICKEL PLATED
- 6 INSULATOR: PTFE
- 7 GASKET: SILICONE RUBBER






ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHz
- 3 VSWR: 1.15 MAX. AT DC~3 GHz
1.30 MAX. AT 3~6 GHz

ENVIRONMENTAL DATA:


- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
C	1. INSULATOR ADDED 2. THE CABLE STRIPPING DIMENSIONS CHANGED	04/11/13	J. QU
D	THE CABLE STRIPPING DIMENSIONS CHANGED	07/07/15	J. QU
E	II [.433] WAS 12.7 [.500]	07/10/15	J. QU

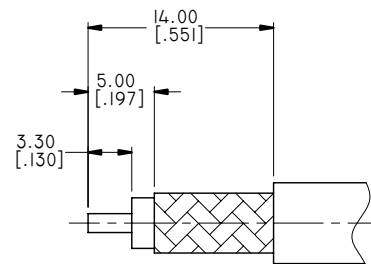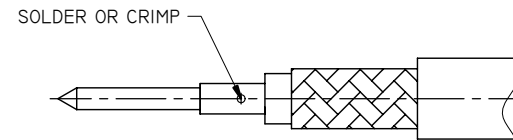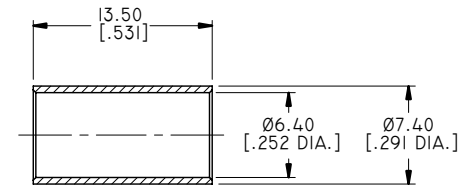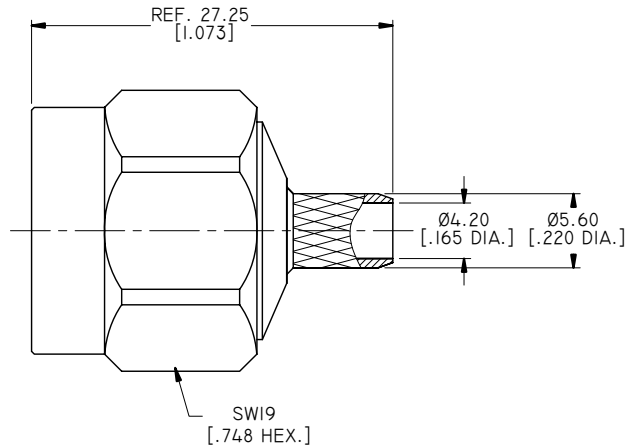

CABLE STRIPPING DIMENSIONS

HEX. CRIMP TOOL



CRIMP WIDTH: II [.433]

DRAWN	X. B. YANG	DATE	07/10/15
CHECKED	L. YANG	DATE	07/10/15
APPROVED	J. QU	DATE	07/10/15
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
N STRAIGHT MALE CRIMP FOR LMR240 CABLE

VIEW	PART NO. ANO 5111-2151						
SIZE	A3	SCALE	2.5:1	SHEET	I/1	REV.	E