

1.0 MATERIAL & FINISH:

- 1.1 BODY: BRASS, NICKEL PLATED
- 1.2 CENTER CONTACT: BRASS, GOLD PLATED
- 1.3 INSULATOR: PTFE
- 1.4 COUPLING NUT: BRASS, NICKEL PLATED
- 1.5 O-RING: MVQ(SILICONE RUBBER)





2.0 ENVIRONMENTAL DATA:

- 2.1 TEMPERATURE RANGE: -55°C~+125°C
- 2.2 2011/65/EU (RoHS): COMPLIANT


3.0 ELECTRICAL DATA:

- 3.1 IMPEDANCE: 50 Ω
- 3.2 FREQUENCY RANGE: DC~11GHZ
- 3.3 VSWR: 1.25 MAX. AT DC~6GHZ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/06/16	J. QU

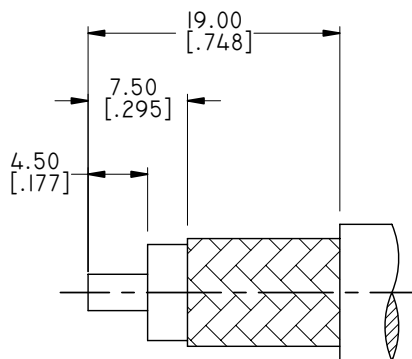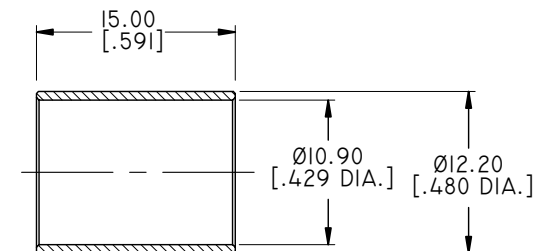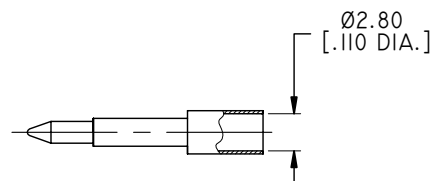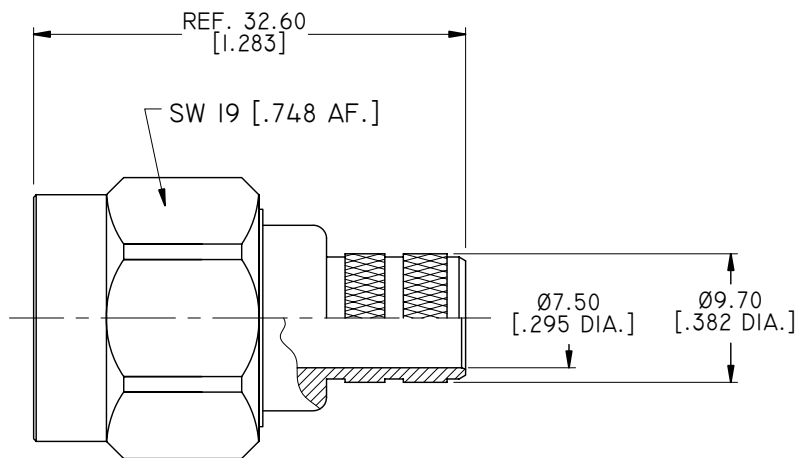

HEX. CRIMP TOOL



HEX. 10.9 [.429]

CRIMP WIDTH: 13.5 [.531]

CABLE STRIPPING DIMENSIONS

DRAWN	L. YANG	DATE	02/06/16
CHECKED	X. B. YANG	DATE	02/06/16
APPROVED	J. QU	DATE	02/06/16
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
N STRAIGHT MALE CRIMP FOR LL400 CABLE

VIEW
PART NO. ANO 5111-2245

SIZE	SCALE	SHEET	REV.
A3	2.5:1	I/1	A