

4

3

2

1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/13/17	J. Q
B	CHANGED STRIPPING DIMENSIONS	05/10/23	J. Q

MATERIAL & FINISH:


- 1 BODY: BRASS, ALBALOY PLATED
- 2 CENTER CONTACT: BRASS, SILVER PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, ALBALOY PLATED

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHZ
- 3 VSWR: ≤1.25 TYP.
- 4 PIM: ≤-160DBC AT 2X43DBM

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -40°C ~ +85°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

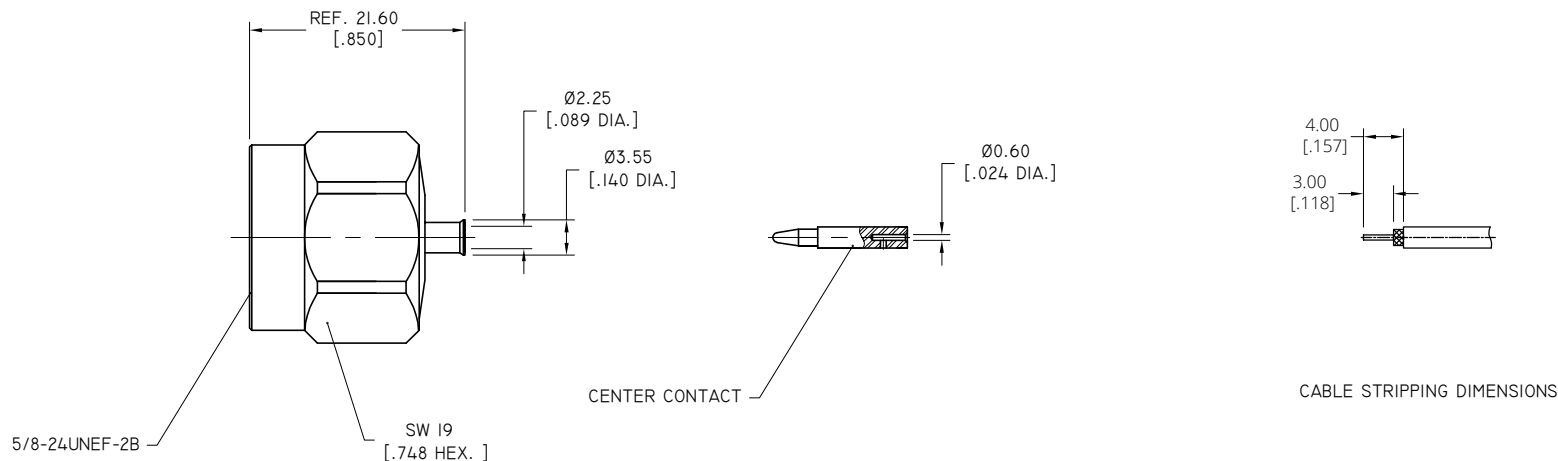

CABLE STRIPPING DIMENSIONS

DRAWN	W. Y	DATE	05/10/23
CHECKED	L. Y	DATE	05/10/23
APPROVED	J. Q	DATE	05/10/23
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X*	±0.50 [.019"]		
X*	±1°		
X*	±2°		



TITLE			
N STRAIGHT MALE SOLDER FOR .086 CABLE			
VIEW	PART NO.		
	ANO 5111-2272		
SIZE	SCALE	SHEET	REV.
A3	2:1	1/1	B

4

3

2

1