MATERIAL & FINISH:

1 BODY: STAINLESS STEEL, PASSIVATED
2 CENTER CONTACT: BRASS, GOLD PLATED
3 SOLDER FERRULE: BRASS, GOLD PLATED
4 COUPLING NUT: STAINLESS STEEL, PASSIVATED
5 INSULATOR: PTFE

ELECTRICAL DATA:

1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~8 GHz

ENVIRONMENTAL DATA:

1 TEMPERATURE RANGE: -55℃~+125℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/02/25	J. Q

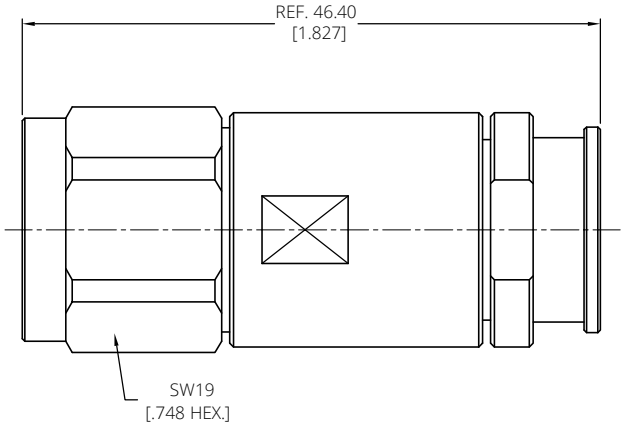

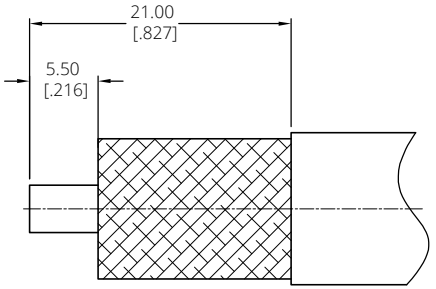

CABLE STRIPPING DIMENSIONS

DRAWN	W. Y	DATE 04/02/25
CHECKED	X. Y	DATE 04/02/25
APPROVED	J. Q	DATE 04/02/25

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2025 ANOISON ELECTRONICS LTD

ANOISON

TITLE: N STRAIGHT MALE SOLDER FOR PLEX480S CABLE

VIEW

PART NO.: ANO 5111-2379

SIZE	SCALE	SHEET	REV.
A3	2.5:1	1/1	A