

**MATERIAL & FINISH:**

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 COUPLING NUT: STAINLESS STEEL, PASSIVATED
- 4 RETAINING RING: PHOSPHOR BRONZE, UNPLATED
- 5 INSULATOR: PTFE & PEI



**ELECTRICAL DATA:**

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-18 GHZ
- 3 VSWR: 1.15 MAX.
- 4 DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN.

**ENVIRONMENTAL DATA:**


- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/02/18	J. Q
B	COUPLING NUT OUTLINE DRAWING CHANGED	01/11/23	J. Q

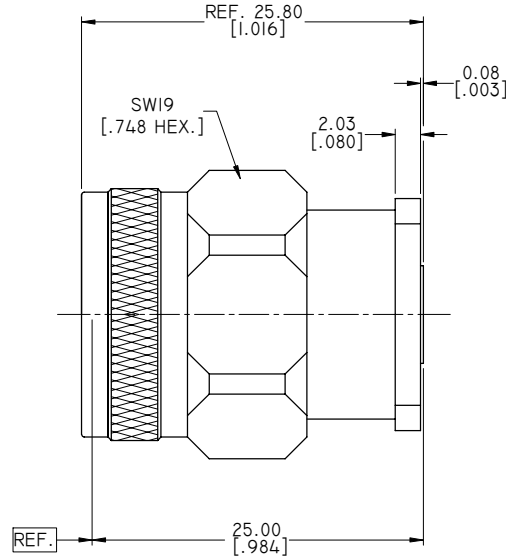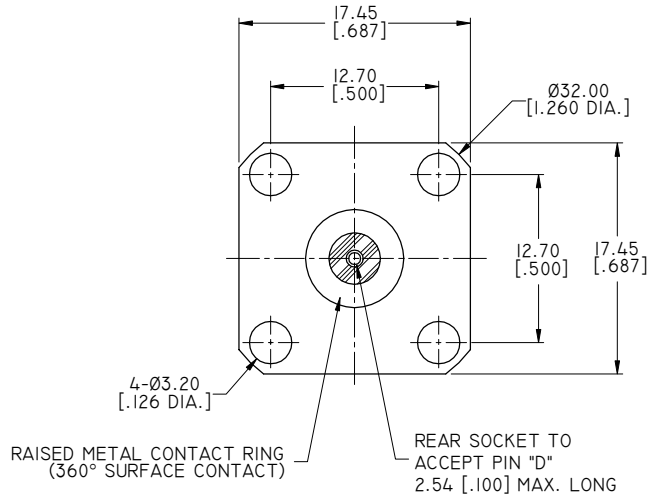



PART NO.	D
ANO 5111-3306-1	Ø0.91 [0.036 DIA.]
ANO 5111-3306-2	Ø0.51 [0.020 DIA.]
ANO 5111-3306-3	Ø0.46 [0.018 DIA.]
ANO 5111-3306-4	Ø0.38 [0.015 DIA.]

DRAWN	X. Y	DATE	01/11/23
CHECKED	W. Y	DATE	01/11/23
APPROVED	J. Q	DATE	01/11/23
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD	
.XX	±0.13 [0.005"]		
.X	±0.20 [0.008"]		
X	±0.50 [0.019"]		
.X°	±1°		
X°	±2°		



**TITLE**  
N STRAIGHT MALE, 4 HOLE .687" SQ FLANGE TO ACCEPT PIN

**VIEW**  

<b>PART NO.</b> ANO 5111-3306			
<b>SIZE</b> A3	<b>SCALE</b> 2.5:1	<b>SHEET</b> 1/1	<b>REV.</b> B