

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 FASTENING NUT: BRASS, NICKEL PLATED
- 4 LOCK WASHER: PHOSPHOR BRONZE, NICKEL PLATED
- 5 INSULATOR: PTFE
- 6 O-RING: SILICONE RUBBER
- 7 CRIMP FERRULE: COPPER, NICKEL PLATED




ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~6 GHZ
- 3 VSWR: 1.35 MAX. AT DC~3 GHZ
1.50 MAX. AT 3~6 GHZ


ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -40°C~+155°C
- 2 2011/65/EU (RoHS): COMPLIANT


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/18/05	J. QU
B	CHANGED DRAWING	04/10/18	J. QU

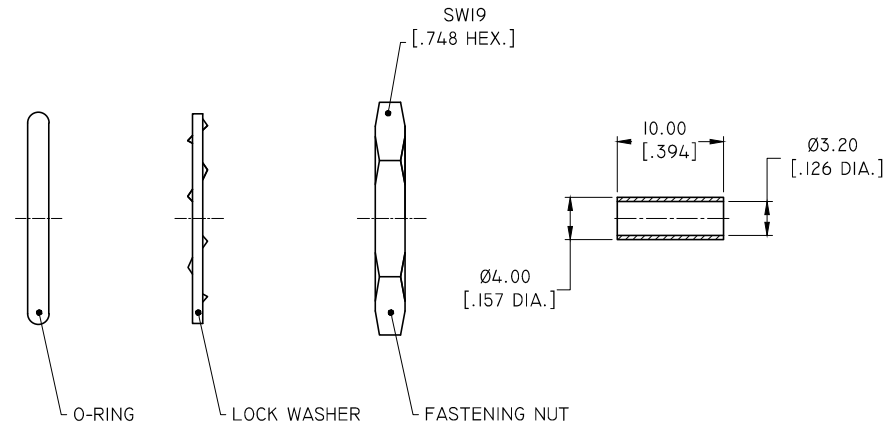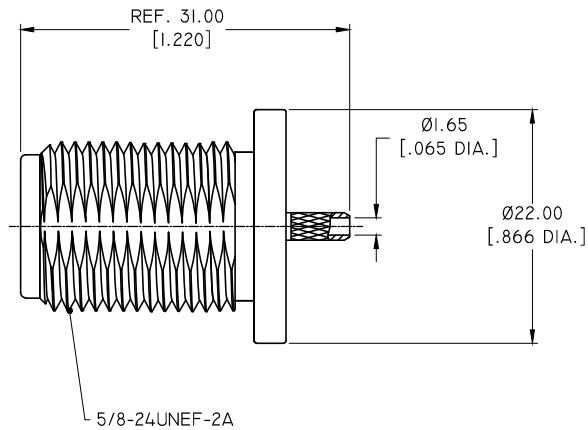

RECOMMENDED MOUNTING HOLE

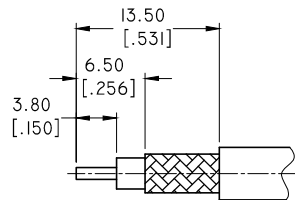

CABLE STRIPPING DIMENSIONS



HEX. CRIMP TOOL
CRIMP WIDTH

DRAWN	W. YANG	DATE	04/10/18
CHECKED	X. B. YANG	DATE	04/10/18
APPROVED	J. QU	DATE	04/10/18
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD	
.XX	+0.13 [.005"]		
.X	+0.20 [.008"]		
X	+0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE			
N STRAIGHT FEMALE WATERPROOF BULKHEAD CRIMP FOR RG174/316/LMR100 CABLE			
VIEW		PART NO.	
		ANO 5112-1010	
SIZE	SCALE	SHEET	REV.
A3	2:1	1/1	B

4

3

2

1