

1.0 MATERIAL & FINISH

- 1.1 BODY: BRASS, NICKEL PLATED
- 1.2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 1.3 INSULATOR: PTFE
- 1.4 CRIMP FERRULE: BRASS, NICKEL PLATED



2.0 ENVIRONMENTAL DATA:

- 2.1 TEMPERATURE RANGE: -55°C~+125°C
- 2.2 2011/65/EU (ROHS): COMPLIANT


3.0 ELECTRICAL SPECIFICATIONS:

- 3.1 IMPEDANCE: 50 Ω
- 3.2 FREQUENCY RANGE: DC~6GHZ
- 3.3 VSWR: ≤1.20


| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 03/07/17 | J. QU |
| | | | |

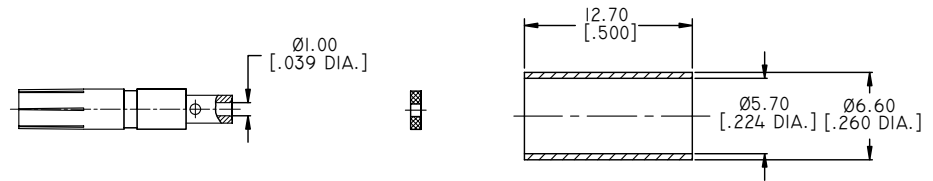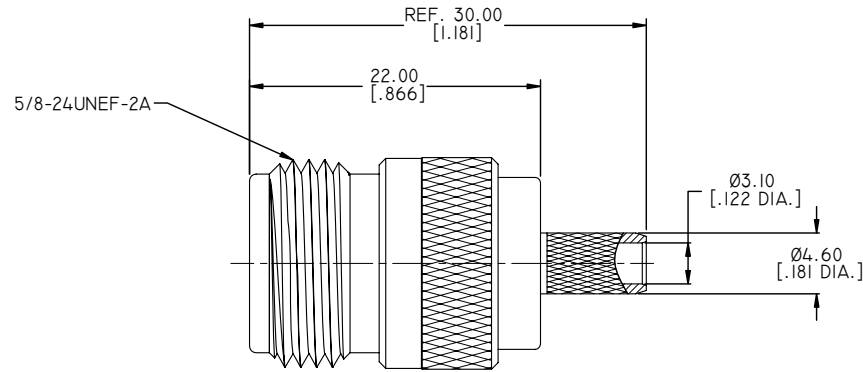

HEX. CRIMP TOOL



CRIMP WIDTH:10 [.394]

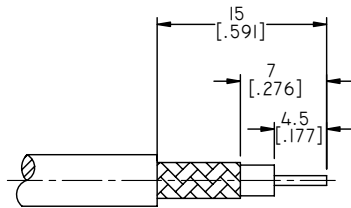

CABLE STRIPPING DIMENSIONS

| | | | |
|---|---------------|--|----------|
| DRAWN | L. YANG | DATE | 03/07/17 |
| CHECKED | P. CHEN | DATE | 03/07/17 |
| APPROVED | J. QU | DATE | 03/07/17 |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD | |
| .XX | ±0.13 [.005"] | | |
| .X | ±0.20 [.008"] | | |
| X | ±0.50 [.019"] | | |
| .X° | ±1° | | |
| X° | ±2° | | |



TITLE
N STRAIGHT FEMALE CRIMP FOR RG223 CABLE

VIEW PART NO. ANO 5112-2278

| | | | |
|------|-------|-------|------|
| SIZE | SCALE | SHEET | REV. |
| A3 | 2.5:1 | I/1 | A |