

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
- 3 INSULATOR: PTFE




ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -40°C~+85°C
- 2 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC~12.4 GHz
- 3 VSWR: 1.50 MAX.
- 4 INSERTION LOSS: 0.48 √F(GHZ) DB MAX.
- 5 VOLTAGE RATING: 850V MAX.
- 6 DIELECTRIC WITHSTANDING VOLTAGE: 2500V MIN.
- 7 INSULATION RESISTANCE: 5000 MΩ

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/15/13	J. QU
B	DRAWING FORMAT CHANGED	08/08/17	J. QU

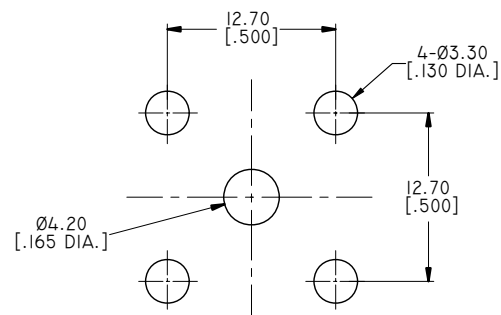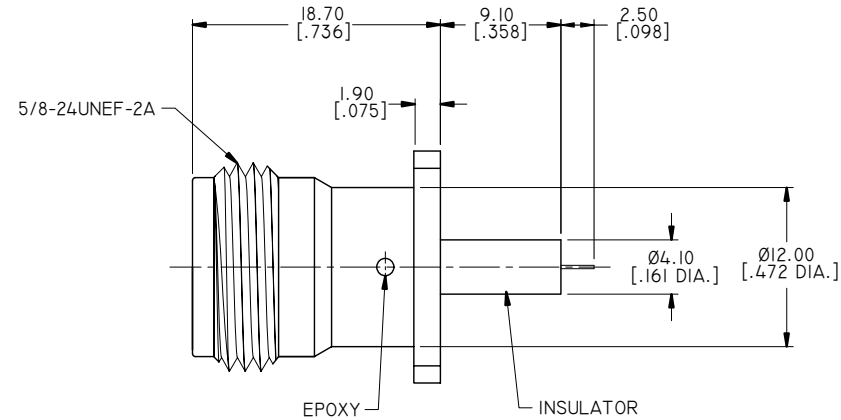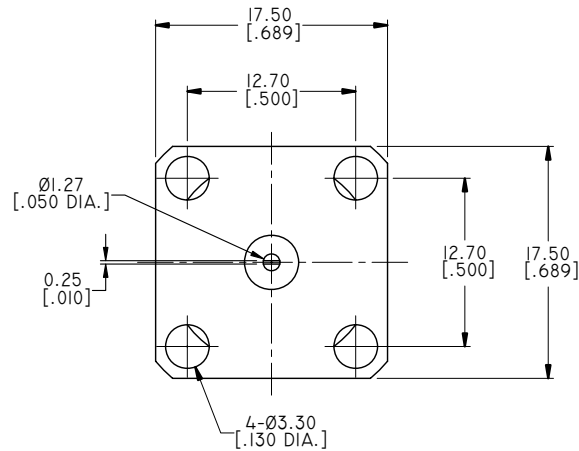

RECOMMENDED MOUNTING HOLE

DRAWN	X. B. YANG	DATE	08/08/17
CHECKED	P. CHEN	DATE	08/08/17
APPROVED	J. QU	DATE	08/08/17
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2017 ANOISON ELECTRONICS LTD	
.XX	±0.13 [.005"]		
.X	±0.20 [.008"]		
X	±0.50 [.019"]		
.X°	±1°		
X°	±2°		



TITLE
N STRAIGHT FEMALE, 4 HOLE .689 SQ. FLANGE MOUNT

VIEW	PART NO. ANO 5112-3127		
	SIZE A3	SCALE 2.5:1	SHEET 1/1
			REV. B