

4

3

2

1

MATERIAL & FINISH:

- 1 BODY: STAINLESS STEEL, PASSIVATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PEI

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-18 GHz
- 3 DWV: 1500 VRMS
- 4 INSULATION RESISTANCE: 5000 MΩ

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C--+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/07/24	J. Q.

D

D

C


C

B

B

A

A

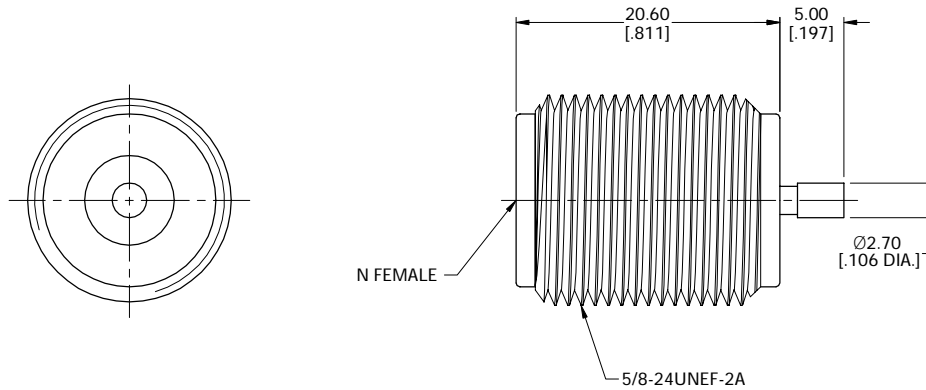

DRAWN	X. Y	DATE	03/07/24
CHECKED	W. Y	DATE	03/07/24
APPROVED	J. Q	DATE	03/07/24




UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

XX	±0.13 [005"]
X	±0.20 [008"]
X	±0.50 [019"]
X°	±1°
X"	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD

TITLE  
N STRAIGHT FEMALE, STRIPLINE RECEPTACLES CONNECTOR



PART NO. ANO 5112-5401			
SIZE A3	SCALE 2.5:1	SHEET 1/1	REV. A

4

3

2

1