MATERIAL & FINISH:

1 N BODY: BRASS, NICKEL PLATED
2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
3 SMB BODY: BRASS, GOLD PLATED
4 INSULATOR: PTFE

ELECTRICAL DATA:

1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~4 GHz
3 VSWR: 1.30 MAX.

ENVIRONMENTAL DATA:

1 TEMPERATURE RANGE: -55℃~+125℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1907/2006/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	02/28/24	J. Q

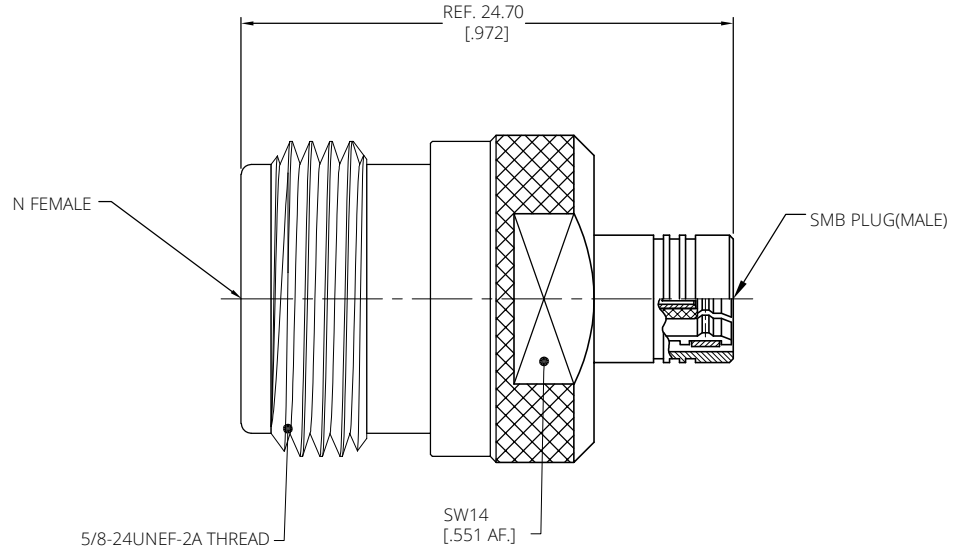

DRAWN	W. Y	DATE 02/28/24
CHECKED	X. Y	DATE 02/28/24
APPROVED	J. Q	DATE 02/28/24

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2024 ANOISON ELECTRONICS LTD

ANOISON

TITLE: ADAPTER, N FEMALE TO SMB PLUG(MALE)

VIEW

PART NO.: ANO 512-171-1662

SIZE	SCALE	SHEET	REV.
A3	4:1	1/1	A