

MATERIAL & FINISH:

- 1 BODY: BRASS, NICKEL PLATED
- 2 CENTER CONTACT: BERYLLIUM COPPER ALLOY, GOLD PLATED
- 3 INSULATOR: PTFE
- 4 FASTENING NUT: BRASS, NICKEL PLATED
- 5 LOCK WASHER: PHOSPHOR BRONZE, NICKEL PLATED
- 6 O-RING: SILICONE RUBBER

ELECTRICAL DATA:

- 1 IMPEDANCE: 50 Ω
- 2 FREQUENCY RANGE: DC-18 GHz
- 3 VSWR: 1.30 MAX.

MECHANICAL DATA:


- 1 RECOMMENDED TORQUE: 20 IN.LBS(FASTENING NUT)

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C ~ +125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1907/2006/EC(REACH): COMPLIANT

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/01/23	J. Q

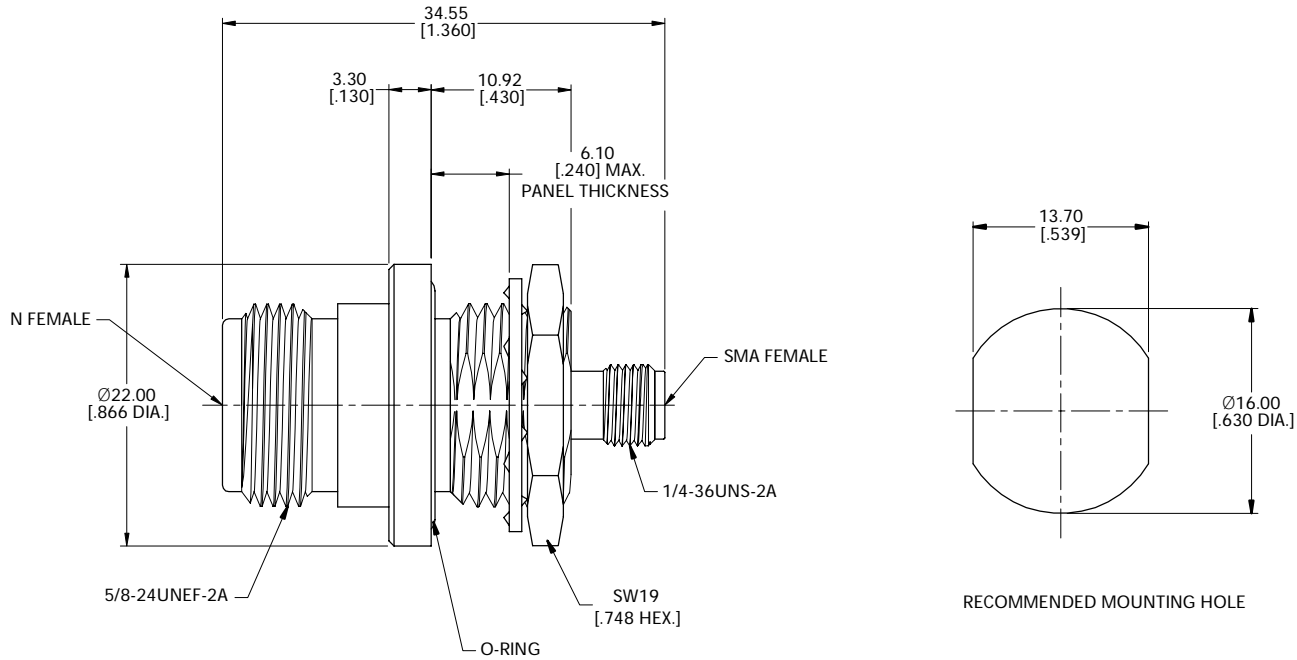

DRAWN	X. Y	DATE	11/01/23	
CHECKED	W. Y	DATE	11/01/23	
APPROVED	J. Q	DATE	11/01/23	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD		TITLE
				ADAPTER, N STRAIGHT FEMALE TO SMA BULKHEAD WATERPROOF FEMALE
		VIEW		PART NO.
				ANO 512-212-1655
		SIZE	SCALE	SHEET
		A3	2.5:1	1/1
		REV.	A	