


DESCRIPTION	MATERIAL	FINISH
Center Contact	Beryllium Copper Alloy	Gold
Body	Stainless Steel	Passivated
Washer	Phosphor Bronze	Nickel
Fastening Nut	Stainless Steel	Passivated
Insulator	PTFE/PEI	—
O-Ring	MVQ (Silicone Rubber)	—

Technical Date

1. Impedance: 50 Ω
2. Temp. range: -55 °C ~ +165 °C
3. Frequency range: DC~18GHz
4. VSWR : 1.20 Max.
5. Insertion loss: 0.24dB Max.
6. 2002/95/EC(RoHS): Compliant
7. Durability: 500 Cycles Min.
8. N Interfaces PER MIL-STD-348A

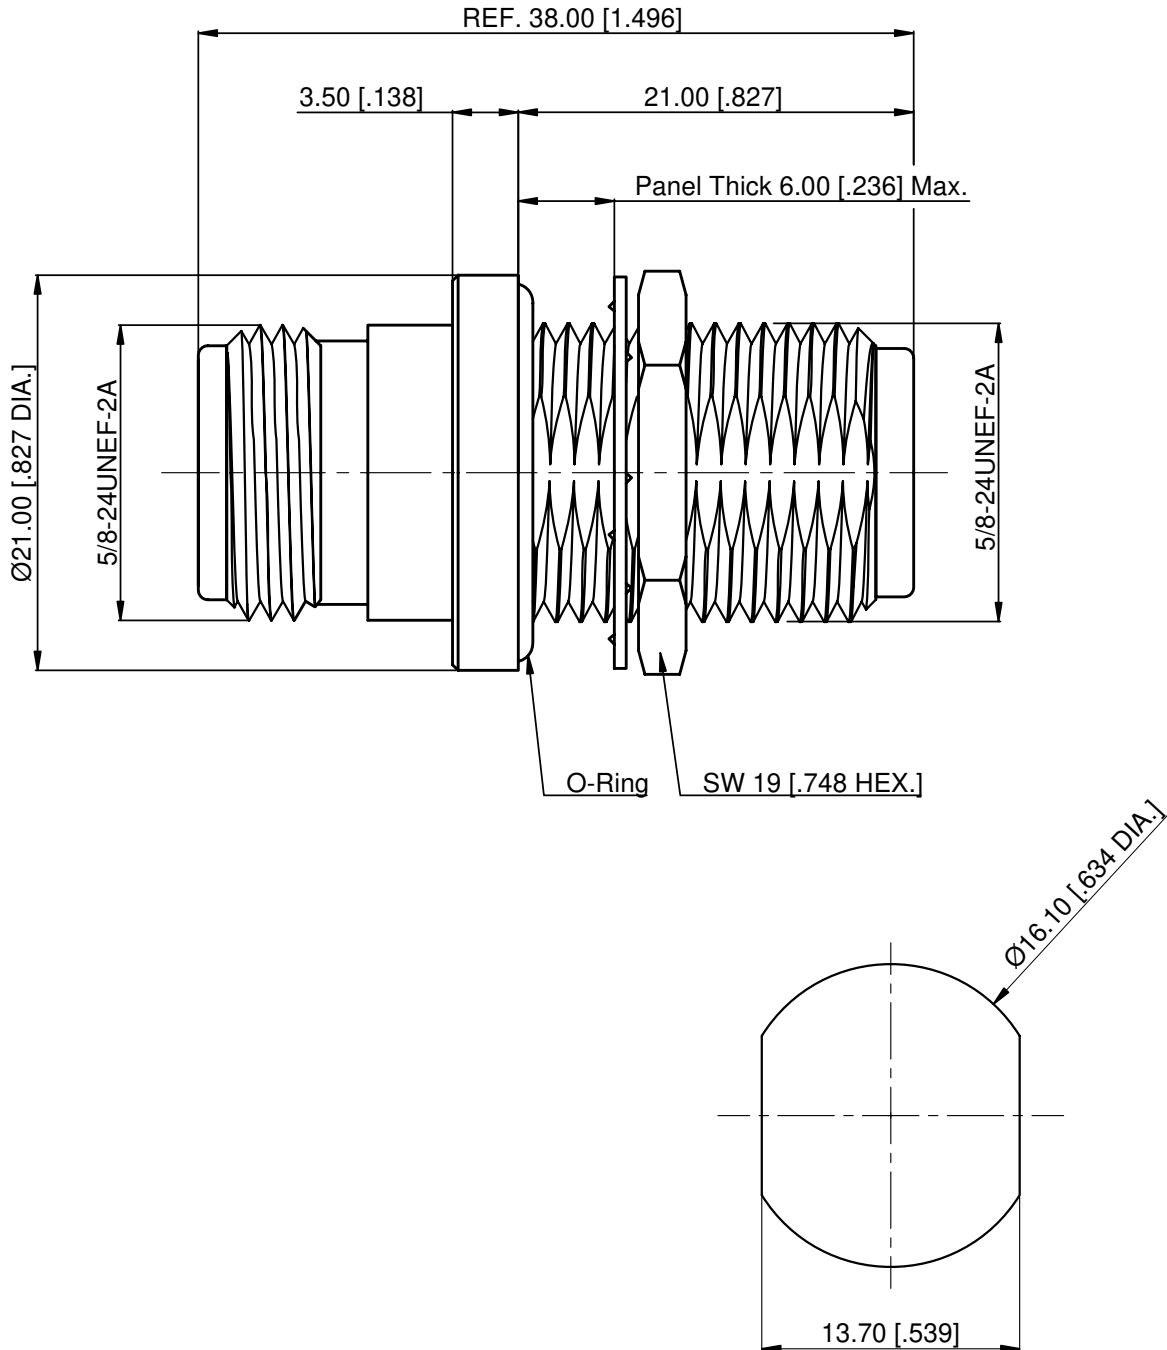

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

				Drawn: X. B. Yang 03/18/13
				Checked: H. Zhang 03/18/13
Description	Ecn.No	Date	Rev	Approved: J. Qu 03/18/13
				Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only. Unless Otherwise Specified tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°

Title:			
Adapter N Female to N Female Bulkhead Waterproof			
View:		Part No:	
		ANO 512-512-1254	
Size:	Scale:	Sheet:	Rev:
A4	2.5:1	1/1	A