MATERIAL & FINISH:

1 BODY: BRASS, NICKEL PLATED
2 CENTER CONTACT: BRASS, GOLD PLATED
3 COUPLING NUT: BRASS, NICKEL PLATED
4 RETAINING RING: PHOSPHOR BRONZE, UNPLATED
5 CRIMP FERRULE: COPPER, NICKEL PLATED
6 INSULATOR: PTFE
7 GASKET: SILICONE RUBBER

ELECTRICAL DATA:

1 IMPEDANCE: 50 Ω
2 FREQUENCY RANGE: DC~6 GHz
3 VSWR: 1.30 MAX. DC~3 GHz

ENVIRONMENTAL DATA:

1 TEMPERATURE RANGE: -55 ℃~+125 ℃
2 2011/65/EU (RoHS): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/09/17	J. QU
B	LMR200 WAS LMR195/LMR200	04/25/23	J. QU

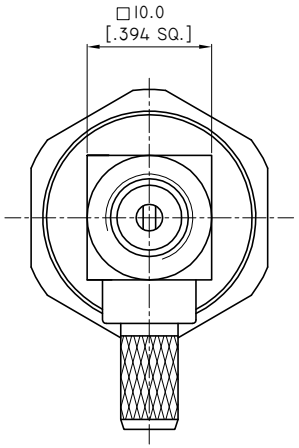

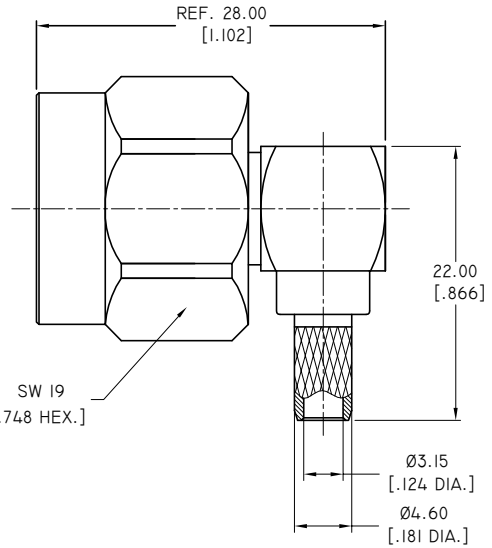

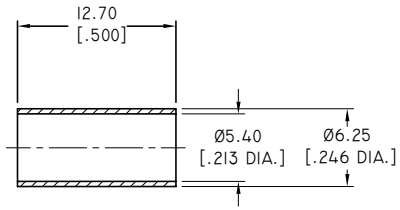

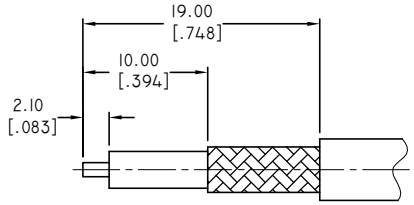

CABLE STRIPPING DIMENSIONS



CRIMP WIDTH: 10 [.394]

DRAWN	P. CHEN	DATE 04/25/23
CHECKED	X. B. YANG	DATE 04/25/23
APPROVED	J. QU	DATE 04/25/23

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLINMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2023 ANOISON ELECTRONICS LTD

ANOISON ...we create connection for technologies

TITLE: N R/A MALE CRIMP FOR LMR200 CABLE, SW 19 HEX.

VIEW

PART NO. ANO 5121-2296

SIZE	SCALE	SHEET	REV.
A3	2.5:1	1/1	B