

MATERIAL & FINISH:

- 1 CENTER CONTACT: BRASS, SILVER PLATED
- 2 OUTER CONTACT: BRASS, ALBALOY PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, ALBALOY PLATED



ELECTRICAL DATA:

- 1 FREQUENCY RANGE: DC-500 MHZ

ENVIRONMENTAL DATA:

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
F	CENTER CONTACT FINISH CHANGED TO SILVER	01/04/17	J. QU
G	1. 2015/863/(RoHS): COMPLIANT ADDED 2. 1999/45/EC(REACH): COMPLIANT ADDED	09/19/18	J. QU

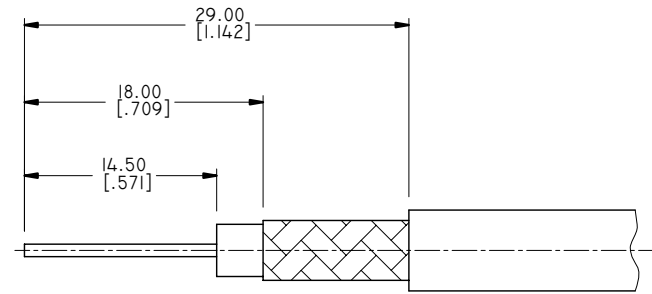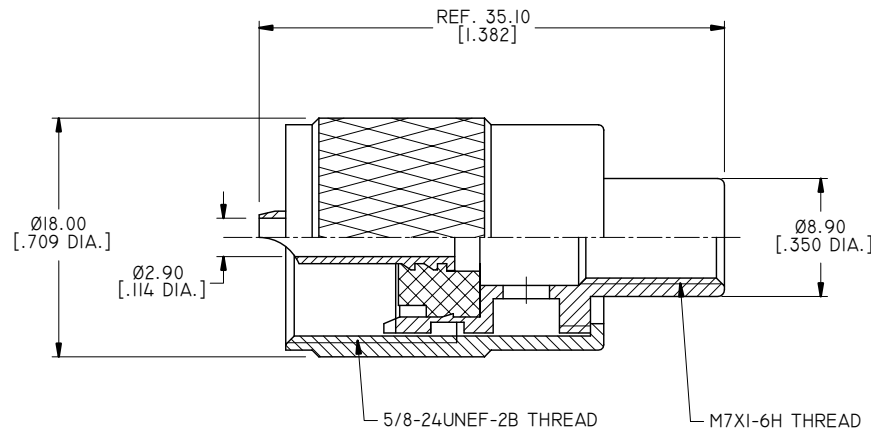

CABLE STRIPPING DIMENSIONS

DRAWN	X. B. YANG	DATE	09/19/18	
CHECKED	W. YANG	DATE	09/19/18	
APPROVED	J. QU	DATE	09/19/18	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:		THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD		TITLE
.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°				UHF STRAIGHT MALE SOLDER FOR LMR240 CABLE
		VIEW		PART NO.
				ANO 5211-2007
		SIZE	SCALE	SHEET
		A3	2.5:1	1/1
		REV.	G	