

**MATERIAL & FINISH:**

- 1 CENTER CONTACT: BRASS, SILVER PLATED
- 2 OUTER CONTACT: BRASS, ALBALOY PLATED
- 3 INSULATOR: PTFE
- 4 COUPLING NUT: BRASS, ALBALOY PLATED



**ELECTRICAL DATA:**

- 1 FREQUENCY RANGE: DC-500 MHZ

**ENVIRONMENTAL DATA:**

- 1 TEMPERATURE RANGE: -55°C~+125°C
- 2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
- 3 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
F	CENTER CONTACT FINISH CHANGED TO SILVER	01/04/17	J. QU
G	1. 2015/863/(RoHS): COMPLIANT ADDED 2. 1999/45/EC(REACH): COMPLIANT ADDED	09/19/18	J. QU

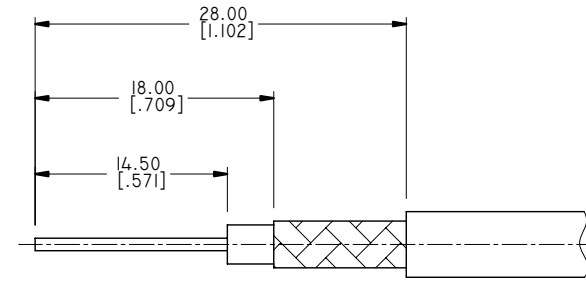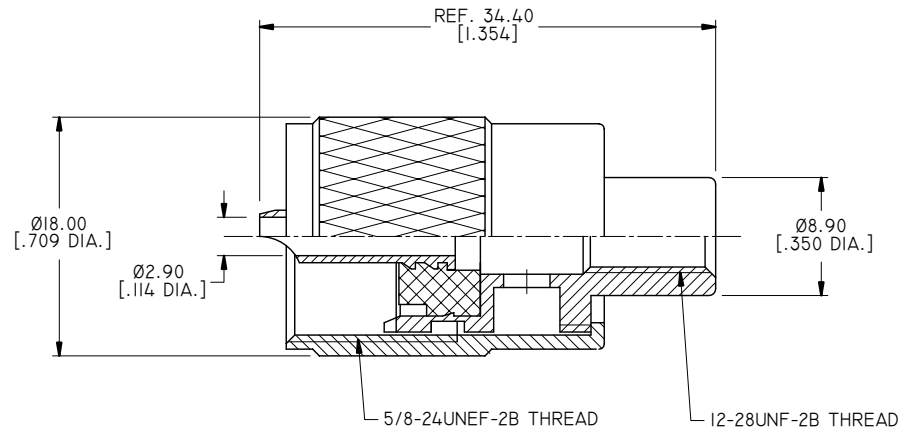

CABLE STRIPPING DIMENSIONS

DRAWN X. B. YANG	DATE 09/19/18	
CHECKED W. YANG	DATE 09/19/18	
APPROVED J. QU	DATE 09/19/18	
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:</small>		<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD</small>
<small>.XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°</small>		<b>TITLE</b> UHF STRAIGHT MALE SOLDER FOR LMR195 CABLE
<small>VIEW</small> 		<b>PART NO.</b> ANO 5211-2008
<small>SIZE</small> A3	<small>SCALE</small> 2.5:1	<small>SHEET</small> 1/1
		<small>REV.</small> G