

MATERIAL & FINISH:


1. BODY: BRASS, ALBALOY PLATED
2. CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
3. INSULATOR: PTFE

ENVIRONMENTAL DATA:

1. TEMPERATURE RANGE: -55 °C~+125 °C
2. 2011/65/EU (RoHS): COMPLIANT

ELECTRICAL SPECIFICATIONS:

1. IMPEDANCE: 50 Ω
2. FREQUENCY RANGE: DC~11GHZ
3. VSWR: 1.30 MAX

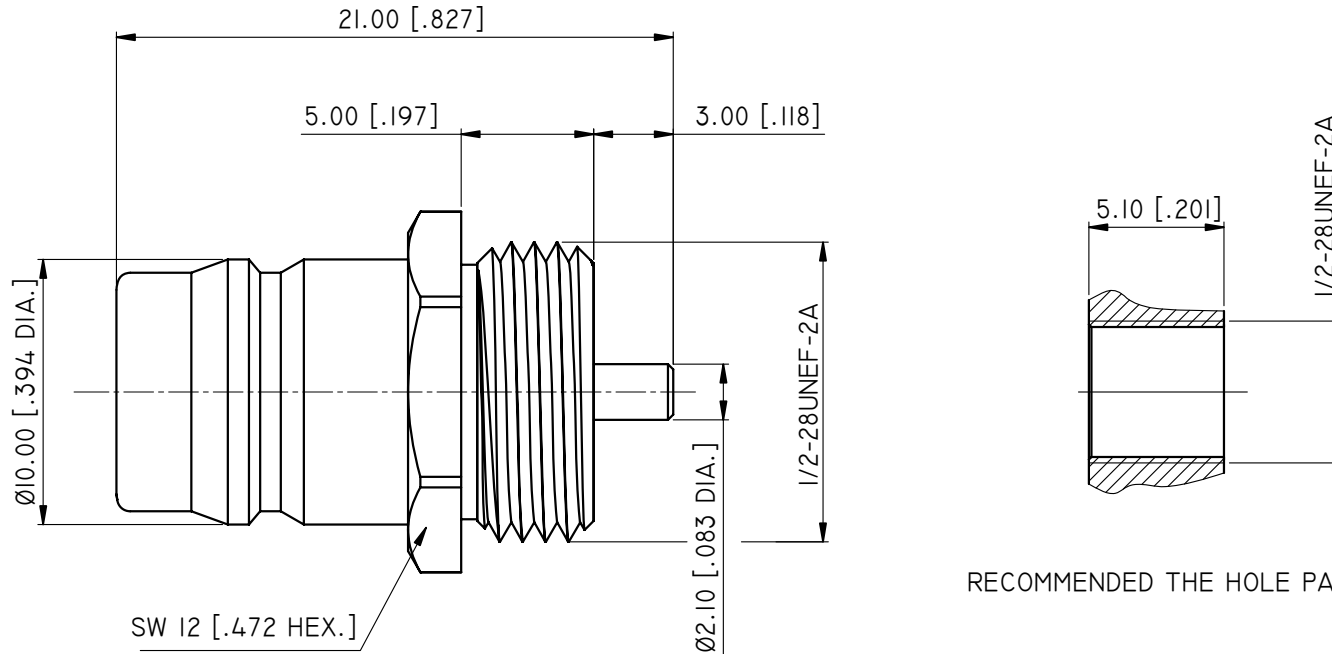

RECOMMENDED THE HOLE PANEL DIM

| REVISIONS | | | |
|-----------|--------------------------------------------------------------------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| B | PAINT CHANGED | 08/30/14 | J. QU |
| C | 1. Ø2.10 [.083 DIA.] WAS Ø2 [.079 DIA.] 2. 1/2-28UNEF-2A WAS M10X0.75 | 03/20/15 | J. QU |

| | | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| DRAWN | L. YANG | DATE | 03/20/15 |
| CHECKED | X. B. YANG | DATE | 03/20/15 |
| APPROVED | J. QU | DATE | 03/20/15 |
| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE: | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2015 ANOISON ELECTRONICS LTD | |
| .XX | ±0.13 [.005"] | | |
| .X | ±0.20 [.008"] | | |
| X | ±0.50 [.019"] | | |
| .X° | ±1° | | |
| X° | ±2° | | |

TITLE
HPQN STRAIGHT FEMALE PANEL MOUNTED SCREW ON

| | | |
|-------------------|---------------------|----------------------------------|
| VIEW | | PART NO. ANO 5312-5002 |
| SIZE A3 | SCALE 5:1 | SHEET 1/1 |
| REV. C | | |