MATERIAL & FINISH:
1 BODY: BRASS, NICKEL PLATED
2 CENTER CONTACT: PHOSPHOR BRONZE, GOLD PLATED
3 FASTENING NUT: BRASS, NICKEL PLATE
4 INSULATOR: PTFE
5 CRIMP FERRULE: BRASS, NICKEL PLATED
6 SCREW CAP: BRASS, NICKEL PLATED

ELECTRICAL DATA:
1 IMPEDANCE: 50 Ω

ENVIRONMENTAL DATA:
1 TEMPERATURE RANGE: -55℃~+85℃
2 2011/65/EU(RoHS) AND 2015/863/(RoHS): COMPLIANT
3 1999/45/EC(REACH): COMPLIANT

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	06/22/13	J. QU
B	DRAWING FORMAT CHANGED	10/26/18	J. QU

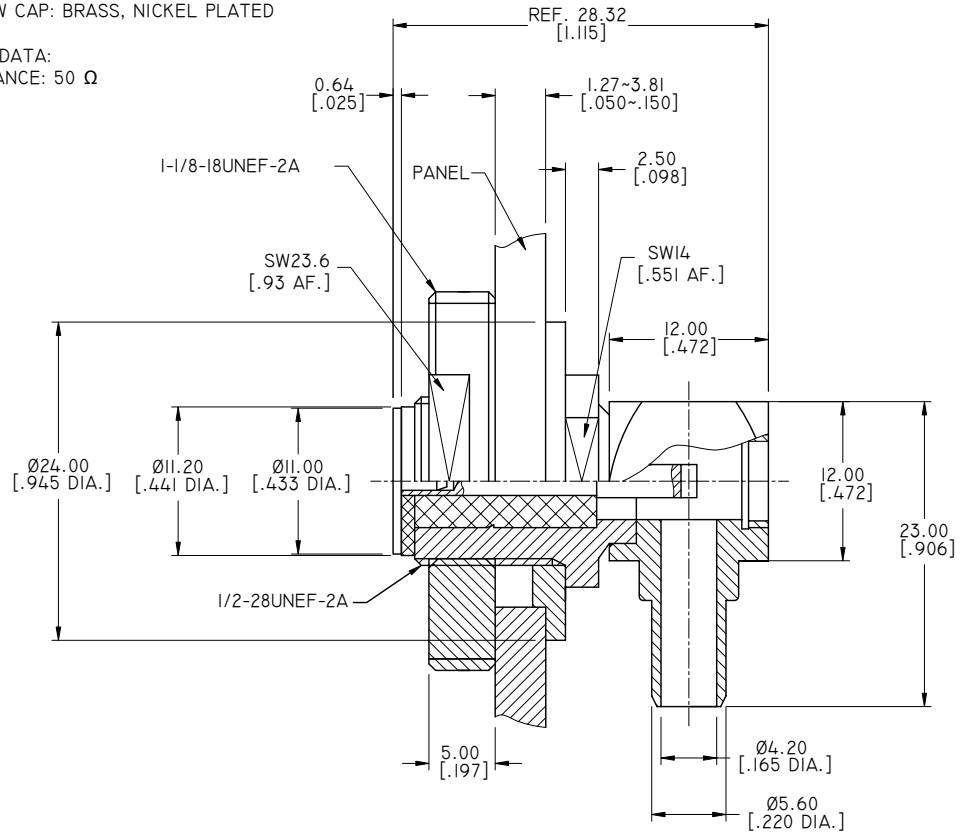

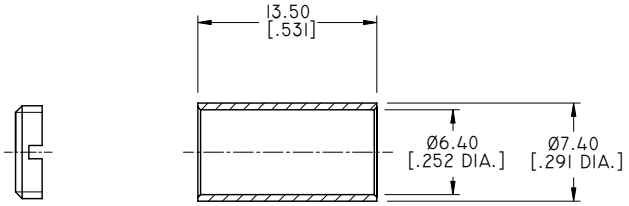

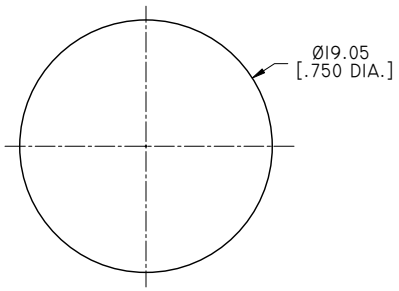

RECOMMENDED MOUNTING HOLE

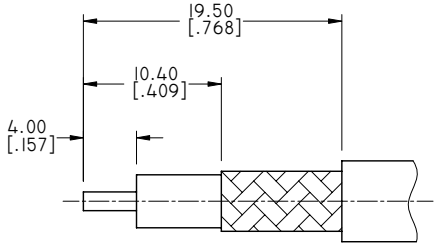

CABLE STRIPPING DIMENSIONS



CRIMP WIDTH: 12.7 [.500]

DRAWN	X. B. YANG	DATE	10/26/18
CHECKED	W. YANG	DATE	10/26/18
APPROVED	J. QU	DATE	10/26/18

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN [ ] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCE ARE:

.XX	±0.13 [.005"]
.X	±0.20 [.008"]
X	±0.50 [.019"]
.X°	±1°
X°	±2°

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ANOISON ELECTRONICS LTD AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION COPYRIGHT © 2018 ANOISON ELECTRONICS LTD

ANOISON
...we create connection for technologies

TITLE
NMO RIGHT ANGLE MALE CRIMP FOR LMR240 CABLE

VIEW

PART NO. ANO 5521-2002

SIZE	SCALE	SHEET	REV.
A3	2.5:1	1/1	B